

GETTING STARTED

1. After assembling the AC power supply by plugging in the power cord carefully screw the threaded power supply plug into the threaded input on the back of the RM3-43. The RM3-43 is powered up by switching on the power switch located on the front of the unit. When on, the red light located on the front upper right of the RM3-43 indicates the unit has AC power connected but is not switched on. When the RM3-43 is switched on the red light is off.
2. Plug the AC power adaptor into a convenient AC power receptacle. The included power supply is switchable and functions with any input between 100V to 240V so with the appropriate adaptor will work in most countries (Check your countries voltage requirements to make certain they match the included AC adaptor).
3. Plug your video source via a composite male BNC plug into the BNC female 'Input' of one or more of the three RM3-43 onboard monitors. The RM3-43 has full loop-thru via the 'Output' so the signal can be passed on to another monitor, a video mixer, or a recording deck if desired.
4. To activate the LED tally, connecting the corresponding pin to ground via the HD-15 connector.
5. When the RM3-43 is rackmounted the unit can be tilted for a more comfortable viewing angle.

RM3-43

Three 4.3" Rack Mount Unit QUICKSTART GUIDE



CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period has expired.

Free Service will not be Provided in the Following Situations: (* Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors etc.

What's included



- RM3-43 Rack Mount Unit
- AC Power Adapter



Checked by

RM3-43

Three 4.3" Rack Mount Unit QUICKSTART GUIDE

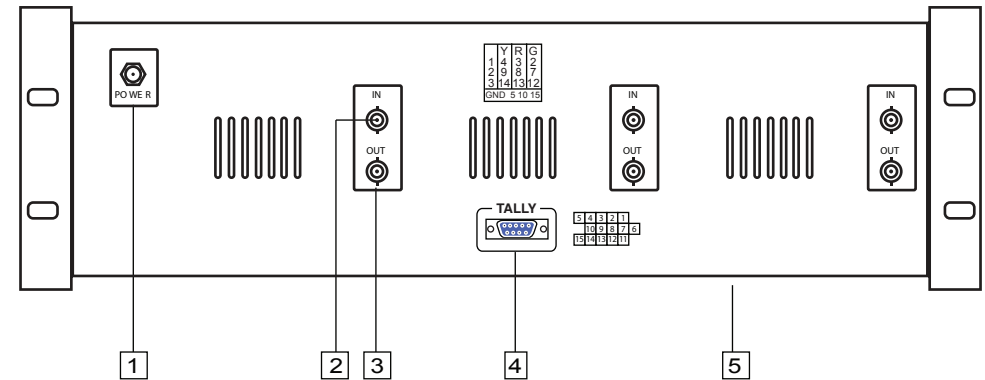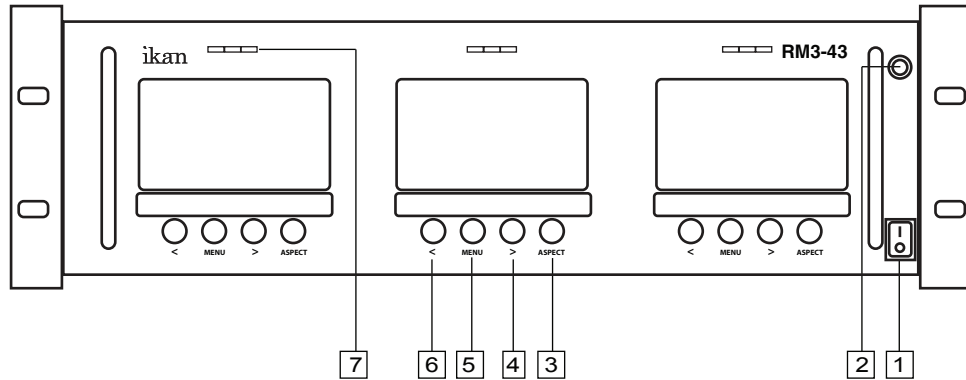

- 1 Power Switch**
Power ON / OFF
- 2 Power Indicator Light**
When the power is ON, the LED lights up.
- 3 ASPECT/EXIT Selection Button**
Aspect: 16:9, 4:3, Full
- 4 > Selection Button**
Adjust the value of setting function
- 5 MENU Selection Button**
Access to all monitor settings
- 6 < Selection Button**
Adjust the value of setting function
- 7 Tally Indicator Light**
When the camera is ON, the LED lights up.

- 1 AC Power Connector**
100V - 240V
- 2 VIDEO terminal (BNC)**
IN: Composite signal input terminal
- 3 VIDEO terminal (BNC)**
OUT: Composite signal output terminal
- 4 Tally port**
HD-15 connection

• For LCD panel adjustment sequentially press the MENU button until you locate the desired parameter: Brightness, Contrast, Hue, Saturation, Menu Language, or Exit. Adjust the specific parameters by using the < and > buttons. To exit the menu, cycle thru until you see 'Exit Menu' and press, or simply wait and the menu will automatically time out.

• Using the aspect ratio select button on the front of the RM3-43 unit, choose the appropriate aspect ratio depending on the source (4:3 or 16:9).