

INTRODUCTION

Thank you for purchasing the ikan V17 LCD Monitor. We know that you will be satisfied with our “V” series monitors. Please visit www.ikancorp.com for more information on our current and future products including our award-winning fluorescent studio lights and light accessories.

PACKAGE INCLUDES

- ☐ V17 LCD Monitor
- ☐ AC Power Adapter



GETTING STARTED


1. Powering The Monitor. To do this, you have two options.

- a) You can plug the AC power cord into the power input jack located on the right side of the rear of the monitor.
- b) You can connect a pro battery using the optional pro battery plate and then plugging that plate into the DC-In connector. The pro battery plate kits (PBPk-S or PBPk-A) allow you to go into the field using standard V-Mount or Gold-Mount batteries.



2. Connecting The Video Source

The V17 allows you to connect to your source feed, using any of the following connections: S-Video (Y/C), SD/HD Component, Composite (A/V), and HDMI Inputs/Outputs.


MONITOR DIAGRAMS

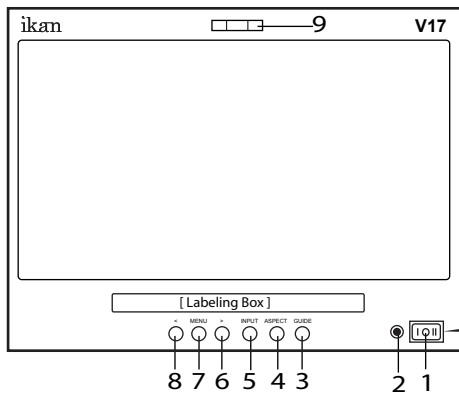

1.	POWER	Power switch (I = AC On, O = Off, II = DC On)
2.	LAMP	Power signal indicator
3.	GUIDES	On-screen guide: 4:3 or 16:9
4.	ASPECT	Aspect ratio: 4:3 or 16:9
5.	INPUT	A/V (Composite), S-Video, SD/HD Component, HDMI
6.	>	While in MENU mode, toggle as up adjust setting
7.	MENU	Access to all monitor settings: Brightness, Hue, etc.
8.	<	While in MENU mode, toggle as down adjust setting
9.	LAMP	Tally Lights

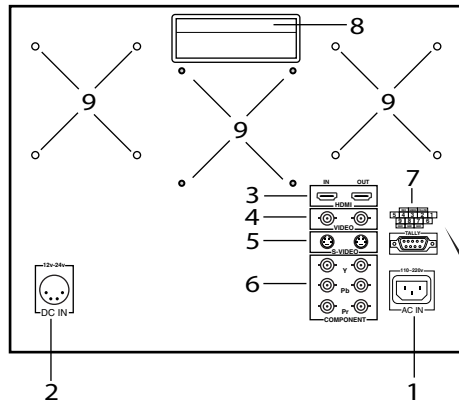

1.	AC 110V-220V Power Connection
2.	DC 12V-24V Power Connection
3.	HDMI Input
4.	A/V - I/O for standard definition composite signal
5.	S-Video - I/O for standard definition S-Video signal
6.	Component - I/O for standard definition, 720p, and 1080i HD signals
7.	Tally
8.	Handle
9.	100mm Holes for Vesa Mount / Pro Battery Mounting Plates



Tally Light Operation

- Do not provide power to tally connections.
- Tally light system is unpowered and works by closing the contact between any of the grounding pins and the pin for the desired LED color.

CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period has expired.

Free Service will not be Provided in the Following Situations: (** Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors etc.