

IFD2511

Featherweight Kit w/ 2x IFD576 & 1x IFD1024 w/ AB & V-Mount Plates

QUICK START GUIDE



What's Included

- 2 x IFD576 LED Lights
- 1 x IFD1024 LED Light
- 3 x HD Stands
- 1 x IBG-1000-3L
- 1 x Stand Bag

Additional Quickstart Guides

- IFD576 LED Light QSG
- IFD1024 LED Light QSG

| |
|-------------------|
| |
| CHECKED BY |

ikan

www.ikancorp.com

support@ikancorp.com

713.272.8822

© 2015 ikan Corporation. All rights Reserved

IFD576

576 Featherweight Daylight LED Light

QUICK START GUIDE



What's Included

- 1 x IFD576
- 1 X AC Adapter + Power Cord
- 1 x Remote Control
- 1 x Yoke
- 1 x Diffuser
- 1 x AB Mount Plate (Attached)
- 1 x AB to V-Mount Adapter

CHECKED BY

ikan

www.ikancorp.com

support@ikancorp.com


713.272.8822

© 2015 ikan Corporation. All rights Reserved

IFD576


Getting Started

1. Connect the included AC Adapter to power the IFD576 light.
2. Turn the light on/off with the power switch.
3. Control the amount of light with the dimmer knob. Adjust the intensity of the light by turning the dimmer knob clock-wise to increase the intensity, and counter clock-wise to reduce it.
4. The IFD576 can also be powered by pro battery.

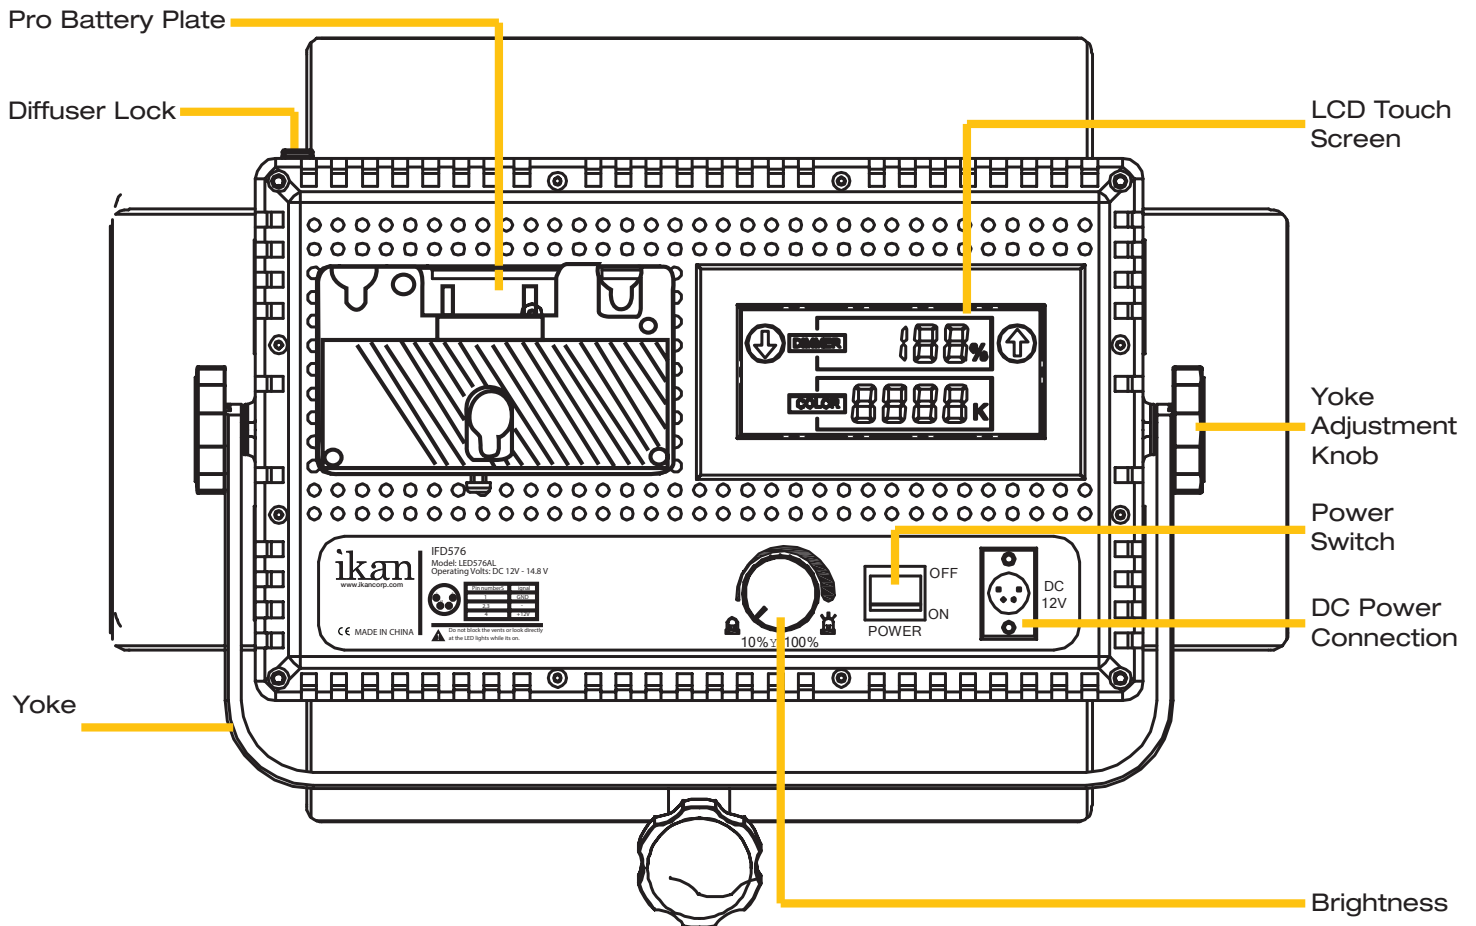

Specifications

| Product Specs | |
|-----------------|--------------------------|
| Beam Angle | 60° |
| Build Material | Heavy Duty Plastic |
| Control | Local Knob & Touchscreen |
| Cooling System | Passive Cooling |
| Dimensions | 13.5" x 8.5" x 2.75" |
| Dimming | 0-100% |
| Focusing | NO |
| Foot Candles | 520.6 |
| Head Type | Daylight |
| Lens | 60° Lens |
| Light Source | 576 0.06 watt LED @5600K |
| Mount | Yoke |
| Operating Volts | 12-24v |
| Power Supply | 12v @ 3.33 Amps |
| Rating | 120v @ 60 Hz |
| Yoke | 60° |
| Fixture Size | 14" x 8.5" x 2.75" |
| Fixture Weight | 4 lbs |
| Shipping Weight | 7 lbs |



Remote Control Button Functions


Press & hold "A" for 5 seconds to sync remote control to light.
 Press "A" to power ON/OFF
 Press "B" to adjust 4 levels of light intensity in increments of 25%
 Press & hold "B" for 5 seconds to enable/disable sound
 Hold down "C" to increase light intensity 0%-100%
 Hold down "D" to decrease light intensity 100%-0%



Optional Accessories

IB-L130A AB-Mount Professional Battery
 IB-L130S V-Mount Professional Battery
 IB-LD160 A
 IB-LD160 S
 C-2KA-KIT
 C-2KS-KIT

Connecting AB-Mount to V-Mount

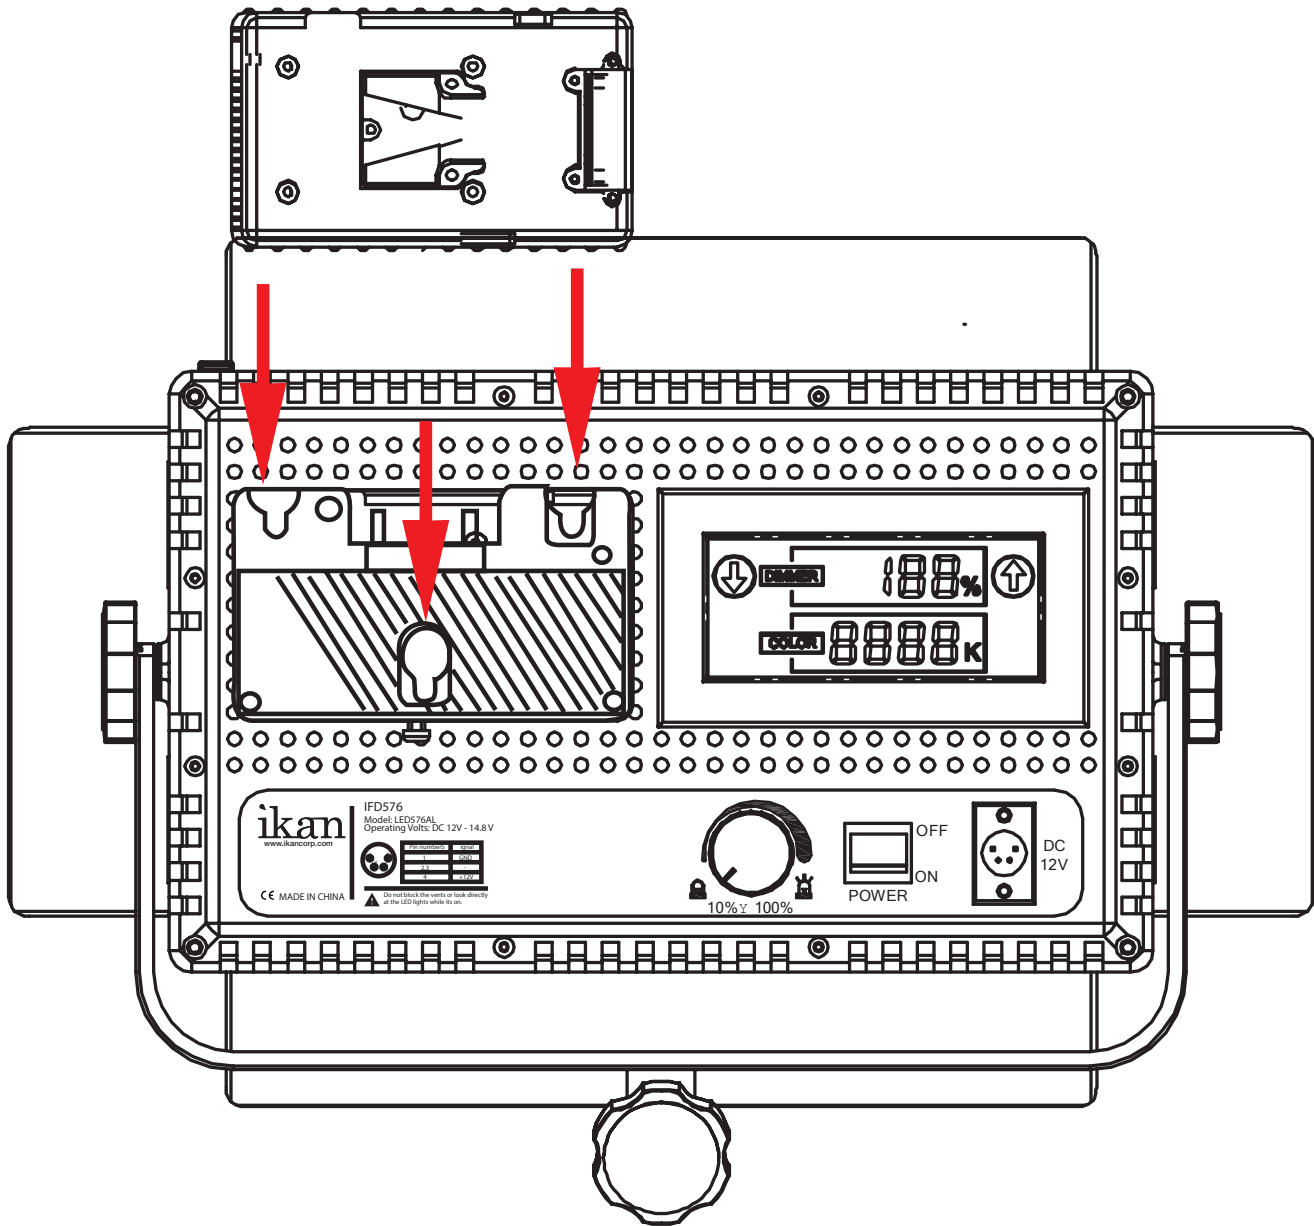

IFD1024

1024 Featherweight Daylight LED Light

QUICK START GUIDE



What's Included

- 1 x IFD1024
- 1 x AC Adapter + Power Cord
- 1 x Remote Control
- 1 x Yoke
- 1 x Diffuser
- 1 x AB Mount Plate (Attached)
- 1 x IB-BTE AB to V-Mount Adapter Plate

CHECKED BY

ikan

www.ikancorp.com


support@ikancorp.com

713.272.8822

© 2015 ikan Corporation. All rights Reserved


Getting Started

1. Connect the included AC Adapter to power the IFD1024 light.
2. Turn the light on/off with the power switch.
3. Control the amount of light with the dimmer knob. Adjust the intensity of the light by turning the dimmer knob clock-wise to increase the intensity, and counter clock-wise to reduce it.
4. The IFD1024 can also be powered by pro battery.

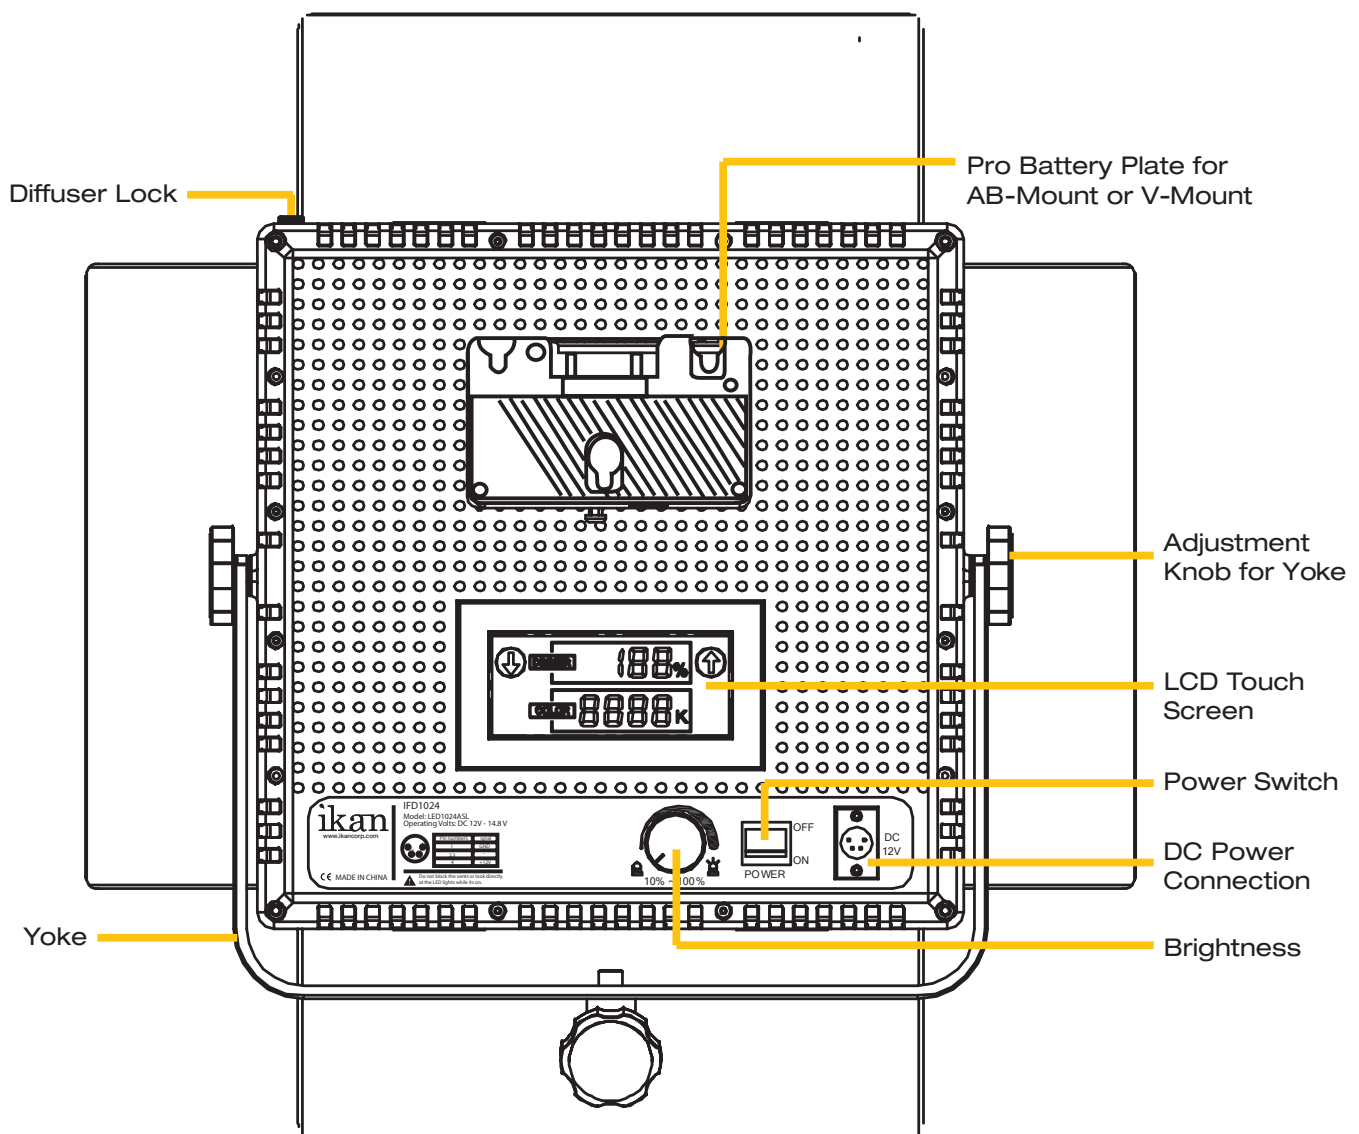

Specifications

| Product Specs | |
|-------------------|----------------------------------|
| Beam Angle | 60° |
| Build Material | Heavy Duty Plastic |
| Color Temperature | 5600(±100) |
| Control | Local Knob Control & Touchscreen |
| Cooling System | Passive Cooling |
| Dimensions | 17" x 14" x 3.75" |
| Dimming | 43.18 x 35.56 x 9.53 cm |
| Fixture Size | 14" x 14" x 2.75" |
| Focusing | NO |
| Foot Candles | 979.8 |
| Head Type | Daylight |
| Lens | 60° Lens |
| Light Source | 1024 0.06watt LED @ 5600K |
| Mount | Yoke |
| Power Supply | 12v @ 6.66 Amps |
| Rating | 120v @ 60Hz |
| Fixture Weight | 6 lbs |
| Shipping Weight | 10 lbs |



Remote Control Button Functions


Press & hold "A" for 5 seconds to sync remote control to light.
 Press "A" to power ON/OFF
 Press "B" to adjust 4 levels of light intensity in increments of 25%
 Press & hold "B" for 5 seconds to enable/disable sound
 Hold down "C" to increase light intensity 0%-100%
 Hold down "D" to decrease light intensity 100%-0%



Optional Accessories

IB-L130A AB-Mount Professional Battery
 IB-L130S V-Mount Professional Battery
 IB-LD160 A
 IB-LD160 S
 C-2KA-KIT
 C-2KS-KIT

Connecting AB-Mount to V-Mount

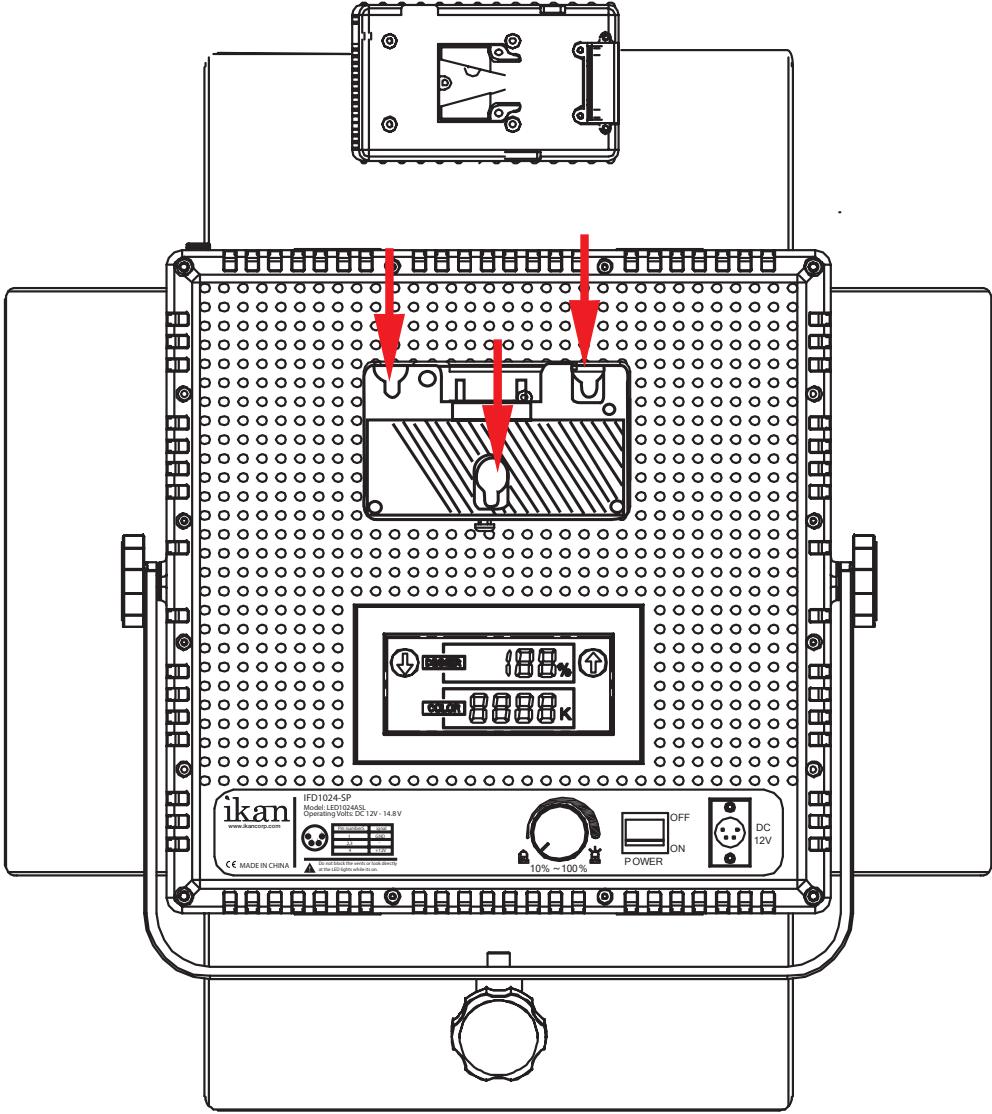

Learn More

More dynamic information at official website: www.ikancorp.com

Support

Contact email: support@ikancorp.com

CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

Free Service will not be Provided in the Following Situations:(*Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.