

## PT3500-HB-TK



## 15" High Bright Beam Splitter Teleprompter &amp; Hard Case

**What's Included**

- 1 x Teleprompter Base Assembly w/ Glass
- 1 x PT-CASE Rolling Hard Case
- 1 x Camera Mount Assembly
- 1 x Hood
- 1 x High Bright LCD Monitor w Power Supply
- 2 x 200mm Riser Rods
- 1 x PrompterPro 4 Software
- 1 x 5/32 Hex Key
- 2 x DRS-01
- 4 x Cork Strips



# Assembly Steps

## Step 1

Place teleprompter base assembly on a flat surface.




## Step 2

It is recommended to level the glass at a 45° angle, however you can position the glass at any angle that suits your needs.




## Step 3

Slide the camera mount assembly onto the 15mm rods.

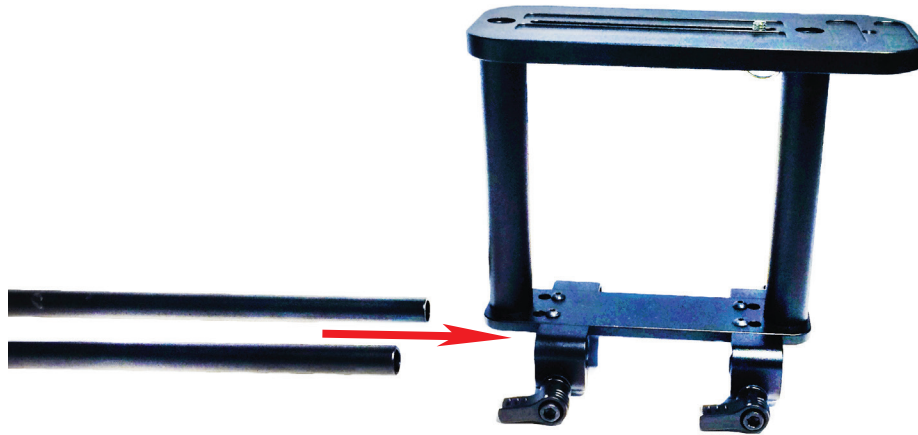

The tripod mount has 3 sets of holes that allow you to mount the plate either towards the front or rear to help balance the teleprompter better. For larger cameras it is recommended to have the plate toward the rear. For smaller cameras it is recommended to have the plate toward the front.

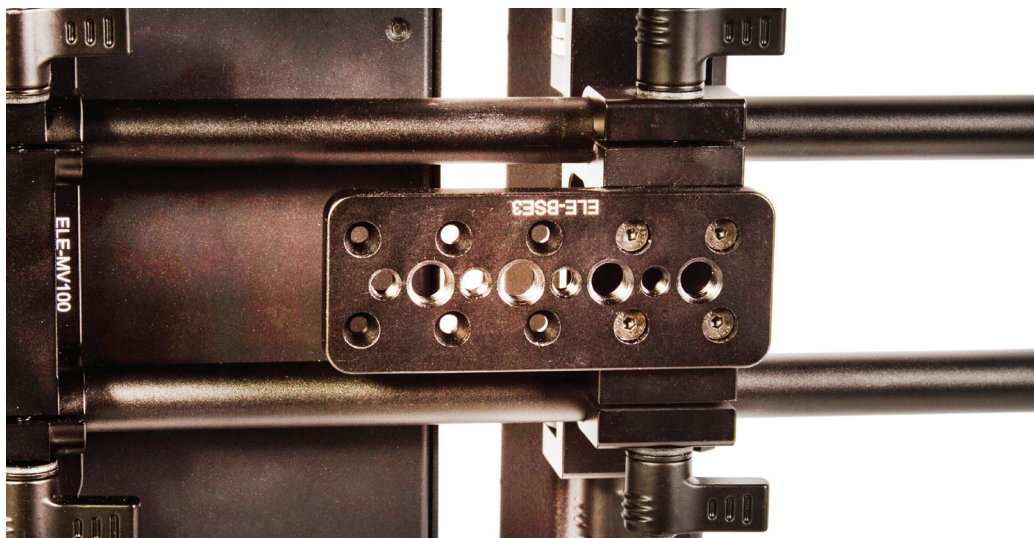

## Step 4

Attach the camera to the mount. Slide the camera mount to the preferred position and secure all thumb screws.

DSLR



Camcorder



If the camera is required to be positioned higher, you can replace the pre-installed 130mm rods with the 200mm riser rods. Use the included 5/32" hex key to remove and attach the rods.




## Step 5

The hood uses magnets to attach to the aluminum frame instead of velcro, making for a quick and reliable attachment/detachment every time.



# Button Configuration & Signal Inputs

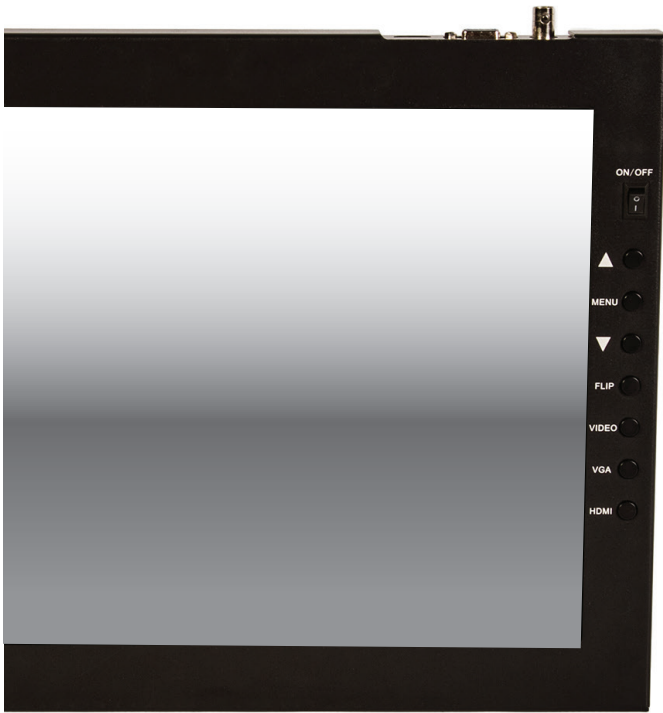

Power Switch  
I = On    O = Off



Toggle up to adjust settings

MENU

Access monitor settings: Brightness, Contrast, etc.



Toggle down to adjust settings

FLIP

Flip image horizontally



HDMI

High-Definition Multimedia Interface  
Input Connection

VGA

Video Graphics Array  
DE15 Connection

VIDEO

Composite  
BNC Input Connection



## Foam Case

To make your teleprompter more portable, we packed it in a reusable, high-quality foam. The shape and size of the foam was designed to fit into Ikan's PT-CASE which is included in this Travel Kit.



**\*\* DO NOT THROW AWAY FOAM CASE \*\***

## Glass Removal

Glass can be removed from the frame by removing the two Phillips head screws. Removal is only recommended for replacement or cleaning purposes.



# Specifications

## PT3500-HB-TK

Aspect Ratio	4:3
Brightness	1000 cd/m2
Build Material	Aluminum / Steel
Contrast Ratio	500:1
Diagonal	15"
Input Signal	Composite BNC, VGA, HDMI
Input Voltage	DC 12v / 4A
Operating Volts	DC 12v / 4A
Power Consumption	10 w
Reading Range	20'
Resolution	1920 x 1080
Supported Video Signals	0-65 C
Viewing Angle	160° (H) / 140° (V)
Shipping Weight	42 lb
Shipping Dimensions	4.1" x 24.6" x 20"

## Optional Accessories

**PT3100-G** Replacement Glass for PT3500



## Learn More

More dynamic information at official website: [www.ikancorp.com](http://www.ikancorp.com)

## Support

Contact email: [support@ikancorp.com](mailto:support@ikancorp.com)

---

### CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

#### **Free Service will not be Provided in the Following Situations:(\*Even if the product is still within the warranty period.)**

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.

©2018 ikan Corporation. All rights reserved

