

IFB1024-KIT

IFB1024 3-Point Light Kit

ONE SHEET

Overview

The 3-Point Light Kit features include bi-color capabilities and a 60-degree angle that delivers reliable, consistent performance.

The IFB1024 Featherweight Bi-Color LED Light features 1024 LED lights that allow you to easily adjust and control the color temperature between 3200K Tungsten and 5600K Daylight using the LCD touchscreen. Large rotary knobs and an included remote are also offered for dimming and dialing in color temperature. The integrated yoke mount makes the IFB1024 easy to set up. A multi-voltage DC power supply is included and for portable power a pro battery plate for either Sony V-mount (-S) or Anton Bauer (-A) is supplied. A removable diffuser is included and the pre-mounted four leaf barn doors with intensifiers can be folded flat for transportation.



IFB1024-KIT | IFB1024 3-Point Kit | UPC Code: 847983013654

Special Features

- Ultra-light, Compact, Dual-color Light
- LCD Touch-Screen Controller with Dimmer Knobs
- Includes Pro Battery Plates for Anton Bauer & Sony V-mount
- Yoke Mount, Barn Doors with Removable Intensifiers, and Diffuser

Recommended For

- Studio Lighting
- Product Photography

ikan

www.ikancorp.com

1.713.272.8822

sales@ikancorp.com



www.facebook.com/ikanseeit



www.twitter.com/ikancorp



www.vimeo.com/ikancorp



www.youtube.com/ikancorp

IFB1024-KIT

Features you need, Prices you want.

Full-Spectrum, Cinema Quality Color

With Bi-Color LED bulbs, ikan's IFD576 is a powerful flood light that lets you enjoy soft, beautiful light and excellent color purity in just about any shooting scenario. This is the LED light you've been looking for.

Easy-to-Adjust Light Intensity

With a touch-sensitive digital display, a dimmer knob, and a remote control, you have options when it comes to adjusting the light intensity. The IFB1024 puts you in control so you can get the perfect lighting for your shot every time.

Exceptional Quality

As the IFB1024 light comes equipped with an AB to V-Mount pro battery plate, barn doors with intensifiers, diffuser, power supply, remote control, and yoke mount, it is an exceptional value.


What's Included

- 3 X IFB1024 Lights
- 1 X Light Bag
- 1 X Stand Bag
- 3 X AB Mount Plates (Attached)
- 3 X AB To V-Mount Adapter Plates
- 3 X HD Stands

IFB1024 Lights Available in Multiple Kits

IFB1024-2PT-KIT
IFB2511
IFB2115

Photometrics

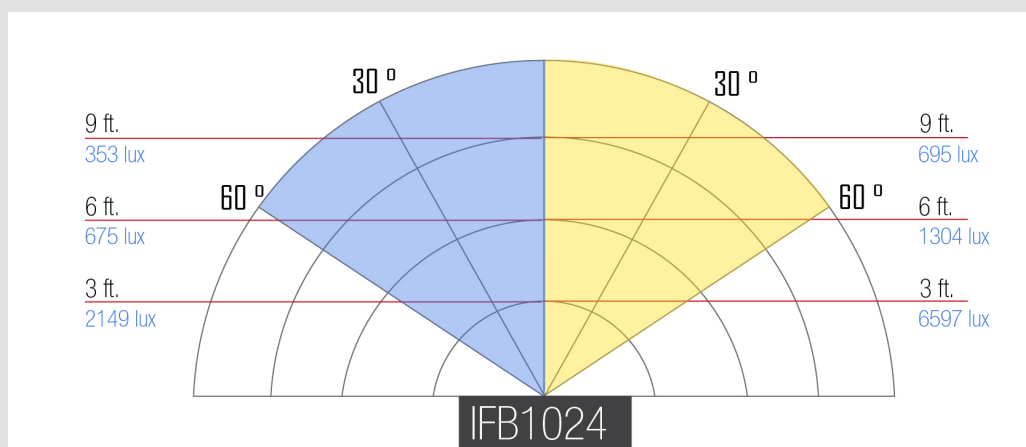

Specifications

Beam Angle	50°
Build Material	Heavy Plastic
Color Temperature	3200K (±100K) / 4000K (±100K)/ 5600K (±100K)
Control	Local Knob & Touchscreen
Cooling System	Passive Cooling
Dimensions	17" x 14" x 3.75"
Dimming	10-100%
Fixture Size	14" x 14" x 2.75"
Fixture Weight	6 lbs
Focusing	NO
Foot Candles	506.5/ 961.3/ 613.1
Head Type	Bi-Color
Lens	60° Lens
Light Source	512 0.06w LED @ 5600K 512 0.06w LED @ 3200K
Mount	Yoke
Power Supply	12v @ 6.66 Amps
Rating	120v @ 60Hz
Shipping Weight	41 lbs
Shipping Dimensions	18" x 18" x 24"

Optional Accessories

C-2KA-KIT	AB Mount Pro Power System
C-2KS-KIT	V-Mount Portable Pro Power System
PWRGP-1	Power Grip
ID500-PS	Power Supply for ID500/IB500

