

PT3500-HB/PT3700-HB



High Bright Beam Splitter Teleprompter

**What's Included**

- ☐ 1 x Teleprompter Base Assembly w/ Glass
- ☐ 1 x Camera Mount Assembly
- ☐ 1 x Hood
- ☐ 1 x High Bright LCD Monitor w Power Supply
- ☐ 2 x 200mm Riser Rods
- ☐ 1 x PrompterPro 4 Software
- ☐ 1 x 5/32 Hex Key
- ☐ 2 x DRS-01
- ☐ 4 x Cork Strips

Assembly Steps

Step 1

Place teleprompter base assembly on a flat surface.




Step 2

It is recommended to level the glass at a 45° angle, however you can position the glass at any angle that suits your needs.




Step 3

Slide the camera mount assembly onto the 15mm rods.

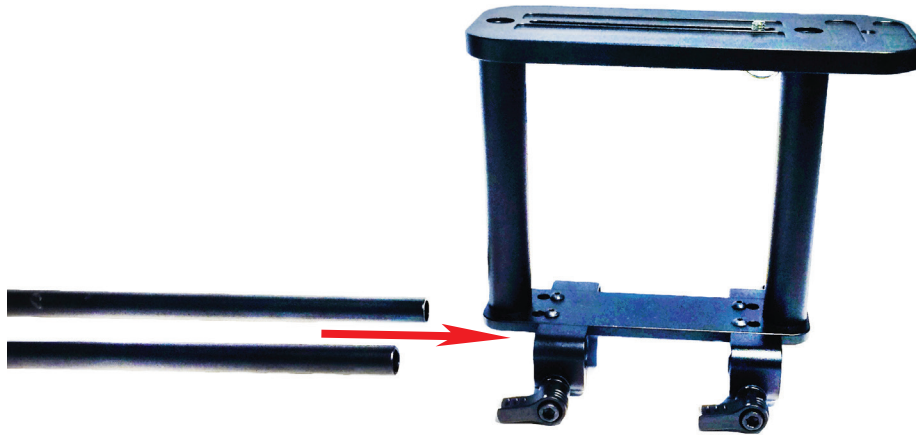

The tripod mount has 3 sets of holes that allow you to mount the plate either towards the front or rear to help balance the teleprompter better. For larger cameras it is recommended to have the plate toward the rear. For smaller cameras it is recommended to have the plate toward the front.

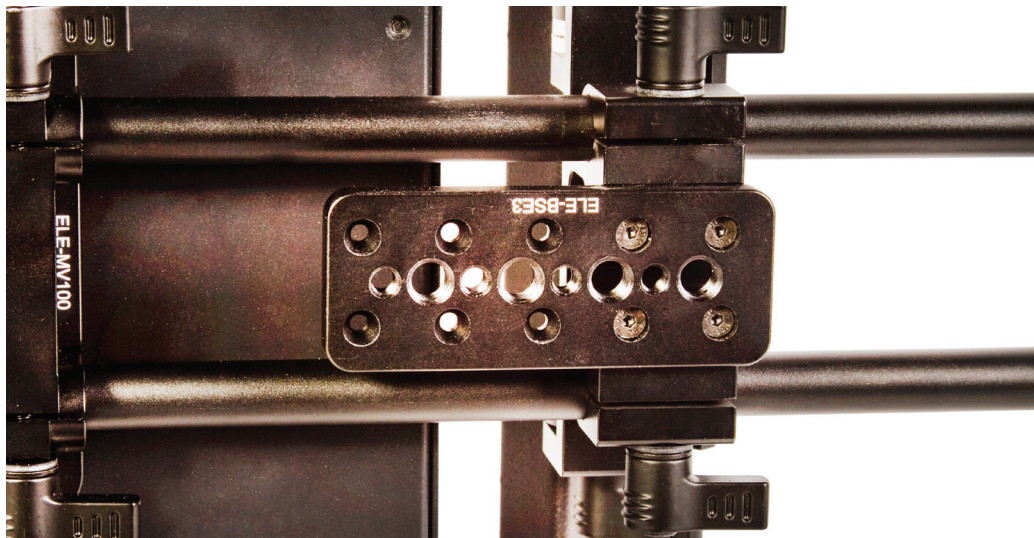

Step 4

Attach the camera to the mount. Slide the camera mount to the preferred position and secure all thumb screws.

DSLR



Camcorder



If the camera is required to be positioned higher, you can replace the pre-installed 130mm rods with the 200mm riser rods. Use the included 5/32" hex key to remove and attach the rods.




Step 5

The hood uses magnets to attach to the aluminum frame instead of velcro, making for a quick and reliable attachment/detachment every time.



Monitor Ports

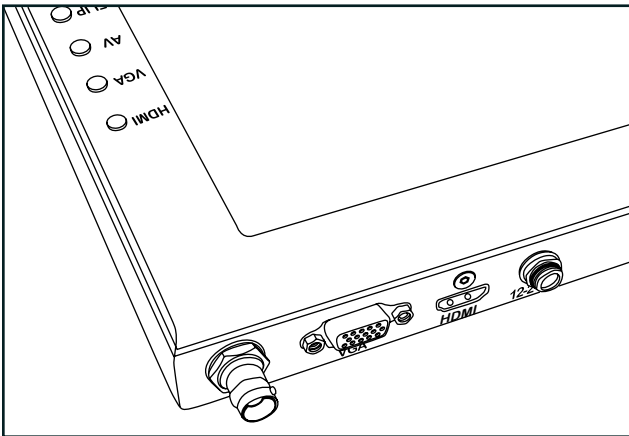

BNC – AV Composite Input
VGA – Video Graphics Array DE15 Connection
HDMI – High-Definition Multimedia Interface Input Connection
Power Port – 12-24v Input

Monitor Menu Settings

Video Config

- Contrast (White Level)
- Brightness (Black Level)
- Tint (Chroma Hue)
- Chroma (Chroma Saturation)
- Sharpness (Detail)
- RGB Setup – Manually configure RGB
- Return

System Config

- Menu Duration – Set duration of how long menu stays on screen
- Video Ratio – Set screen aspect ratio 16:9 or 4:3 (4:3 is native resolution, 16:9 will create black bars)
- Flip-H – Assign toggle button to flip image horizontally
- Flip-V – Assign toggle button to flip image vertically
- Reset – Factory reset
- Return


PC Setup (Only available for VGA)

- H-Position – Adjust horizontal position
- V-Position – Adjust vertical position
- Auto – Monitor automatically adjust position
- Return

Exit

How to set-up FLIP button feature:

1. Press MENU button
2. Navigate to SYSTEM CONFIG.
3. Navigate to FLIP-V or FLIP-H
4. Change FLIP-V and/or FLIP-H to "ON"
5. Exit MENU
6. The FLIP button should now be activated and can be pressed to mirror the image Horizontally or Vertically
7. When FLIP-H is ON, the image will flip Horizontally
8. When FLIP-V is ON, the image will flip Vertically
9. If both are ON, the FLIP button will toggle both Horizontal and Vertical flip

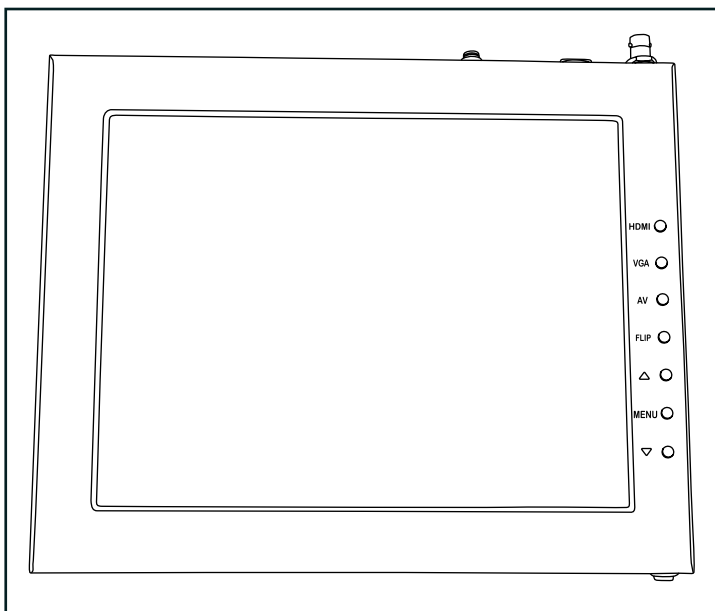

HDMI – Switch HDMI input
VGA – Switch to VGA input
AV – Switch to composite BNC input
Flip – Toggle image flip
(Can be set to horizontal, vertical, or both via menu)
Up Arrow – Toggle up to adjust setting
Menu – Access to monitor settings
Down Arrow – Toggle down to adjust setting

Foam Case

To make your teleprompter more portable, we packed it in a reusable, high-quality foam. The shape and size of the foam was designed to fit into Ikan's PT-CASE.



**** DO NOT THROW AWAY FOAM CASE ****

Glass Removal

Glass can be removed from the frame by removing the two Phillips head screws. Removal is only recommended for replacement or cleaning purposes.



Specifications

PT3500-HB

Aspect Ratio	4:3
Brightness	1000 cd/m2
Build Material	Aluminum / Steel
Contrast Ratio	500:1
Diagonal	15"
Input Signal	Composite BNC, VGA, HDMI
Input Voltage	DC 12v / 4A
Operating Volts	DC 12v / 4A
Power Consumption	10 w
Reading Range	20'
Resolution	1024 x 768
Supported Video Signals	0-65 C
Viewing Angle	160° (H) / 140° (V)
Weight	15 lb
Shipping Weight	21 lb
Shipping Dimensions	29.5" x 19" x 10.5"

PT3700-HB

Aspect Ratio	4:3
Brightness	1000 cd/m2
Build Material	Aluminum / Steel
Contrast Ratio	500:1
Diagonal	17"
Input Signal	Composite BNC, VGA, HDMI
Input Voltage	DC 12v / 4A
Operating Volts	DC 12v / 4A
Power Consumption	10 w
Reading Range	20'
Resolution	1280 x 1024
Supported Video Signals	0-50 C
Viewing Angle	160° (H) / 140° (V)
Weight	21 lb
Shipping Weight	27 lb
Shipping Dimensions	29.5" x 19" x 10.5"

Optional Accessories

- PT-CASE** Rolling Hard Case for PT3500 / PT3700 Teleprompters
- PT3100-G** Replacement Glass for PT3500
- PT3700-G** Replacement Glass for PT3700

Learn More

More dynamic information at official website: www.ikancorp.com

Support

Contact email: support@ikancorp.com

CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

Free Service will not be Provided in the Following Situations:(*Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.

©2018 ikan Corporation. All rights reserved

