

# IFB2511

Featherweight Large Bi-Color Kit w/ 2x IFB576 & 1x IFB1024  
with AB to V-Mount Adapter Plates

ONE SHEET

## Overview

The 3-Point Light Kit features include bi-color capability and a lightweight design that delivers reliable, consistent performance.

The IFB576 Featherweight Bi-Color LED Light features 576 energy efficient LED lights that allow you to easily adjust and control the color temperature between 3200K Tungsten and 5600K Daylight using the LCD touchscreen. The IFB1024 Featherweight Bi-Color LED Light features 1024 LED lights that allow you to easily adjust and control the color temperature between 3200K Tungsten and 5600K Daylight using the LCD touchscreen. Large rotary knobs and an included remote are also offered for dimming and dialing in color temperature. The compact designs with integrated yoke mounts make the IFB576 and the IFB1024 portable and easy to set up. Multi-voltage AC power supplies are included and for portable power a pro battery plate for either Sony V-mount (-S) or Anton Bauer (-A) is supplied. Removable diffusers are included and the pre-mounted four leaf barn doors with intensifiers can be folded flat for transportation.



IFB2511 | Featherweight Large Bi-Color Kit w/ 2x IFB576 & 1x IFB1024 | UPC Code: 847983013616

## Special Features

- Ultra-light, Compact, Dual-color Light
- LCD Touch-Screen Controller with Dimmer Knobs
- Includes Pro Battery Plates for Anton Bauer & Sony V-mount
- Yoke Mount, Barn Doors with Removable Intensifiers, and Diffuser

## Recommended For

- Studio Lighting
- Product Photography



[www.facebook.com/ikanseit](http://www.facebook.com/ikanseit)



[www.twitter.com/ikancorp](http://www.twitter.com/ikancorp)



[www.vimeo.com/ikancorp](http://www.vimeo.com/ikancorp)



[www.youtube.com/ikancorp](http://www.youtube.com/ikancorp)

ikan

[www.ikancorp.com](http://www.ikancorp.com)

1.713.272.8822

[sales@ikancorp.com](mailto:sales@ikancorp.com)

# IFB2511

Features you need, Prices you want.



## Specifications

Beam Angle	50°
Build Material	Heavy Duty Plastic
Control	Touchscreen
Cooling System	Passive Cooling
Dimming	10-100%
Fixture Weight	4 lbs & 6 lbs
Focusing	NO
Head Type	Bi-Color
Lens	60° Lens
Mount	Stand Mount
Power Supply	12v @ 3.33 Amps & 12v @ 6.66 Amps
Rating	120v @ 60Hz
Weight	26 lbs
Shipping Weight	35 lbs
Shipping Dimensions	18 x 18 x 24 in.

## What's Included

- 1 x IFB1024 Light
- 1 x Light Bag
- 1 x Stand Bag
- 2 x IFB576 Lights
- 3 x AB Mount Plates (Attached)
- 3 x AB To V-Mount Adapter Plates

## Photometrics

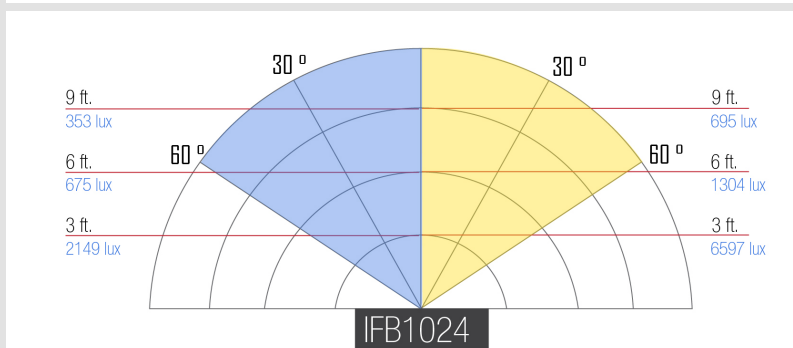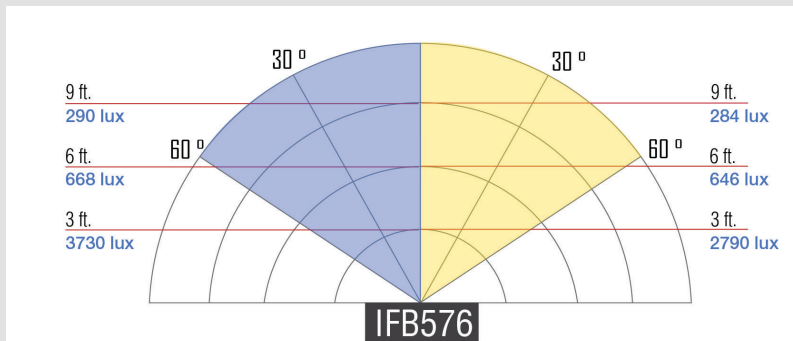

## Specifications for IFB576

Operating Volts	12-24v
Operating Wattage	120v/60Hz: 41watts / 44watts / 82 watt
Beam Angle	50°
Foot Candles	323.9/ 409.0/ 587.2
Color Temperature	3200K (±200K) / 4000K (±200K) / 5600K (±200)
Brightness	3' / 6318 lux / 4000K (±100K)
Light Source	288 0.06w LED @ 5600K 288 0.06w LED @ 3200K
Fixture Size	14" x 8.5" x 2.75"

## Specifications for IFB1024

Operating Volts	12-24v
Operating Wattage	120v/60Hz: 82 watts
Beam Angle	50°
Foot Candles	506.5 / 961.3 / 613.1
Color Temperature	3200K (±100K) / 4000K (±100K) / 5600K (±100K)
Brightness	3' / 10344 lux (±100K) / 4000K (±100K)
Light Source	512 0.06w LED @ 5600K 512 0.06w LED @ 3200K
Fixture Size	14" x 14" x 2.75"

## Optional Accessories

- AB101** Anton/Bauer Power Tap Cable w/ Coaxial
- AB102** Anton/Bauer Power Tap Cable w/ 4-Pin XLR

