

RS-F350


Red Star 6" LED Tungsten Fresnel 350 Watt Light **ONE SHEET**

Overview

The Red Star 6" Fresnel 350-watt light is designed and built for professional photographers, videographers and cinematographers who want high quality at an affordable price.

The 3200K Tungsten Fresnel delivers field-tested reliability, solid construction, and all the features required for professional performance. The RS-F350 features include a six-inch Fresnel lens with a spot-to-flood focusing knob and quiet active cooling system that deliver reliable, consistent performance.

The light is made of solid aluminum and has an energy-efficient LED with high output and excellent color rendering index (CRI). The Red Star has local built-in dimming as well as a digital readout for assigning the light to a DMX channel. The ultra-quiet active cooling fan pulls heat from the fixture. The 4-leaf barn doors cut and shape the light and can be folded flat for transportation.

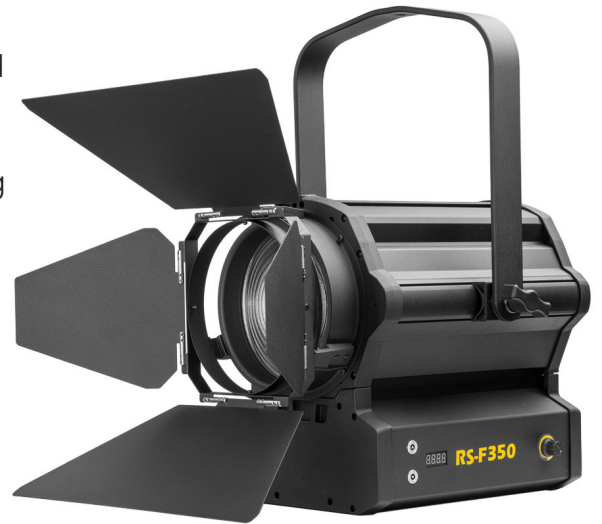

RS-F350 | Red Star 6" Tungsten Fresnel 350 Watt Light | **UPC Code:** 847983014590

Special Features

- 6" Fresnel Lens with Spot Flood Focusing Knob
- Quiet Active Cooling System
- 512 DMX In and Out, Channel Selectors with Digital Readout
- Solid Aluminum Construction
- 4 Way Barn Doors Included (4 Leaf)
- Local Dimming Knob

Recommended For

- Studio Lighting
- Interviews

ikan

www.ikancorp.com

1.713.272.8822

sales@ikancorp.com



www.facebook.com/ikanseeit



www.twitter.com/ikancorp



www.vimeo.com/ikancorp



www.youtube.com/ikancorp

RS-F350

Features you need, Prices you want.

Spot to Flood Lighting

Knob that focuses the light from spot to flood.

Quiet Active Cooling System

Ultra-quiet cooling fan for pulling heat from the fixture.

512 DMX Channel Selectors

Digital readout for assigning the DMX channel of your choice.

4-Way Barn Doors

Black four (4) leaf barn doors for cutting and shaping the light.

Local Dimming Knob

Local dimming for controlling the brightness of the lights.

What's Included

- 1 x 350 Watt Light Fixture
- 1 x 10ft Power Cable
- 1 x Barn Doors
- 1 x Yoke
- 2 x Yoke Screws
- 4 x Yoke Washers



Accessories

- KCP-703 Stage Clamp w/ 16mm Stud
- SW-04 Safety Wire
- MK350 Spectrometer from UPRtek
- IDX-1204 12 Channel DMX Console
- IDX-096 96 Channel DMX Console

Specifications

Beam Angle	14-50 Degree
Build Material	Aluminum
Control	DMX512 IN/OUT - Toggle Button DMX Control
Cooling System	Active Cooling Fan
CRI	96
Dimming	Flicker-Free Dimming, Onboard Dimming Knob, 100-0% DMX Dimmer (Minimal Color Shift)
Fixture Size	14 x 10 12 In.
Fixture Weight	24.5 lbs
Focusing	Rotating Rear Knob
Foot Candles (Flood)	5ft-413 FC / 10ft-122 FC / 15ft-61 FC
Foot Candles (Spot)	5ft-2178 FC / 10ft-523 FC / 15ft-235 FC
Head Type	Tungsten (3200K)
Lens	6 In. Glass Fresnel
Light Source	1 - 350 watt Warm LED 3200K
LUX (Flood)	1.5m-4442 LUX / 3m-1309 LUX / 4.5m-657 LUX
LUX (Spot)	1.5m-234336 LUX / 3m-5623 LUX / 4.5m-2531 LUX
Power Supply	10 Ft. Power Cable
Rating	120 volts AC / 50-60Hz / 150Watts 63-14 amps
Shipping Dimensions	20 x 15 x 17 In.
Shipping Weight	28 lbs
Yoke	Cast Aluminum w/ 1 1/8" Pin

Photometrics

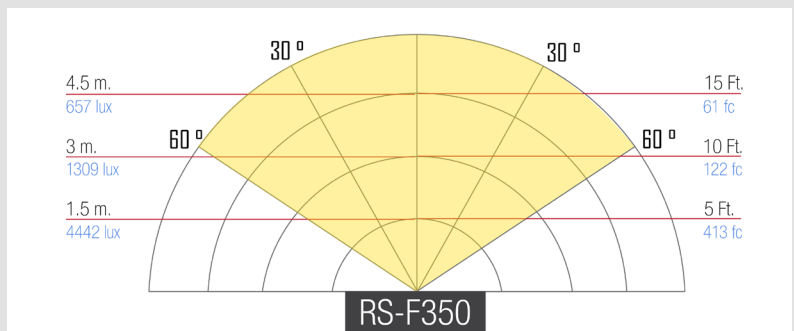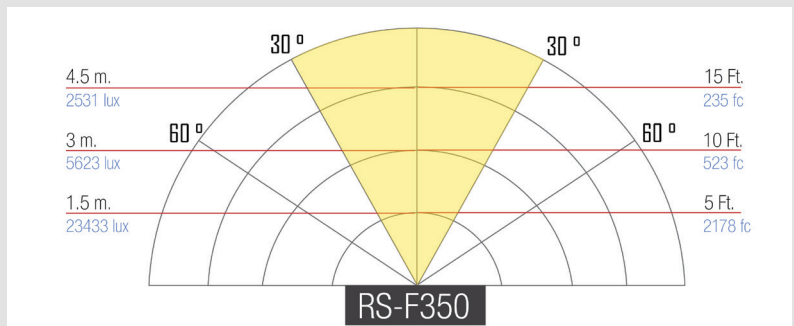

ikan

Houston, Texas

www.ikancorp.com

1.713.272.8822

sales@ikancorp.com