


OLED TXM-243T3G



TXM-243T3G

Featuring 24" Full HD Resolution OLED panel with State-of-the-art AM-OLED Technology, the innovative TXM-243T3G has adjustable Gamma selection(1.0~3.0).

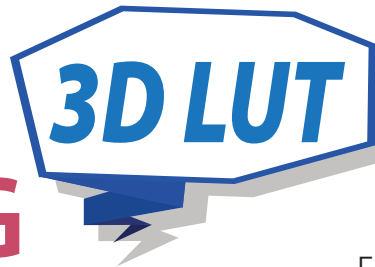

| OLED | | | |
|-----------------------|--------------------------------|--|-------------------------------------|
| Size | 24.5" | Viewing Angle(deg) | 178(H), 178(V) |
| Resolution | 1920 x 1080 | Luminance of White | 400 cd/m ² |
| Pixel Pitch | 0.283mm | Contrast | 5,000 : 1 |
| Color | 10bit | Display Area (H x V) | 543.4 x 305.6mm |
| Input | | | |
| 3G/HD/SD-SDI | Analog(YPbPr/CVBS/S-Video/RGB) | | DVI-I 24pin Female |
| HDMI(with HDCP v.1.1) | 19pin Female | DVI-I to VGA Jack(with gender) | |
| Output | | | |
| 3G/HD/SD-SDI | Analog(YPbPr/CVBS/S-Video/RGB) | | DVI-I 24pin Female |
| HDMI(with HDCP v.1.1) | 19pin Female | External Sync Black Burst & Tri-sync 1.0Vp-p | |
| Analog Input | | | |
| Composite | YC(S-Video) | Component(Y/Pb/Pr) | Component (R/G/B) PC-RGB,Sync Level |
| Input Signal Format | | | |
| SMPTE 425M AB | SMPTE 372M | SMPTE 274M/292M | SMPTE 296M SMPTE 260M |
| SMPTE 125M/259M | 2K, SMPTE 428M | ITU R-BT.656 | HDMI DVI |
| Audio In / Out | | | |
| 1 x Headphone Jack In | | 2 x Headphone Jack Out | 2 x Speaker Out |

* Optional accessories available

- 12-bit Signal Processor
 - Blending, PaP, PiP
 - Focus Assistance
 - Waveform/Vector scope
- Closed Caption (CEA-608/708)
 - Gamma Selection (1.0-3.0)
 - Supporting 3G-SDI (Level A/B)
 - I/P Conversion for Motion Response

- Time Code Display (ATC_HD-SDI,DVITC_SD-SDI, Except 3G Level B)
- AFD & V-CHIP display (SDI Only)
- Various Markers (EBU, 4:3, 16:9, 1.85:1, 2.35:1, etc.)
- R/G/B and White Internal Patterns Display
- Remote Control via GPI(RJ-45) Port