

D7C

ikan


Delta 7" On-Camera 4K Support HDMI Monitor



### What's Included

- 1x D7C Monitor
- 1x Sun Hood
- 1x Power Adapter
- 1x Shoe Mount

# Getting Started

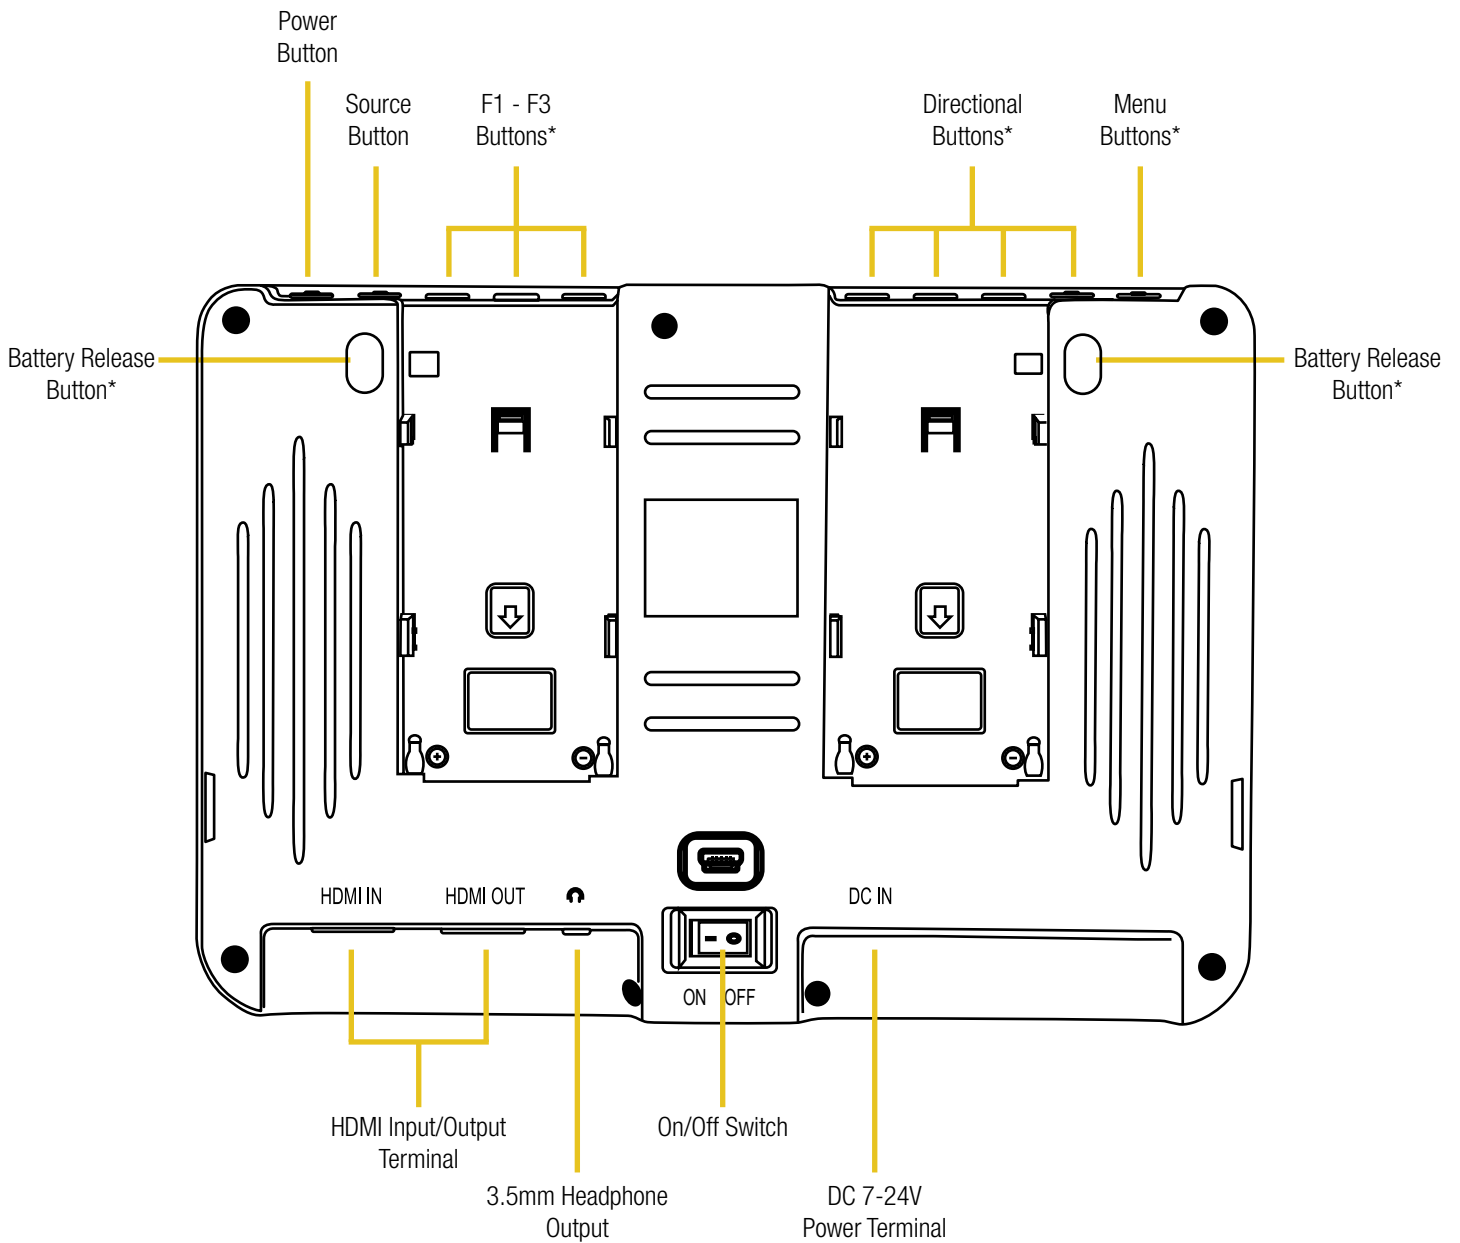

## Button Notes

**F1 - F3 Buttons:** Functions can be mapped in the menu.

**Directional Buttons:** Used to navigate the menu button and can also be mapped in the menu.

**Menu Button:** Opens the menu options.

**Battery Release Buttons:** Press to release the batteries.

# Configuration of Setting Menus

## Assistant

Single Color – Toggle between mono colors: gray, red, green, blue

False Color – This feature utilizes a full spectrum of assigned color indicators to show overall brightness of the image. This helps achieve perfect exposure.

Peaking – The monitor is equipped with a color peaking feature which highlights the desired focus area in a bright color. The operator adjusts the focus until the subject is surrounded with the color outline.

Peaking Color – Adjust the color of peaking: red, green, blue.

Zebra – The monitor will display slanted lines where the image is overexposed or underexposed.

Histogram – Graphical representation of the tonal values of your image.

Audio Meters – Allows the operator to monitor audio channels.

## Guides

Crosshair – Display a crosshair on the center of the screen.

Safety Guides – Safety border between the following: 80%, 85%, 90%, 93%, 96%

Aspect Guides – Toggle border between 4:3, 2.35:1, 1.85:1

Guide Color – Change the color of guide: white, black, red, green, blue

## Video Configuration

Aspect Ratio – Toggle between Auto, 16:10, 16:9, 4:3, 1.85:1, 2.35:1

Scan Mode – Toggle between Under or OverScan

Pixel to Pixel – 1:1 pixel to pixel mapping

Zoom – Allows operator to zoom into the image

Flip-H – Flips the image horizontally

Flip-V – Flips the image vertically

Image Freeze – Freezes the image

Noise Reduction – Assist in reducing the noise in the monitor

## Color Settings

Brightness – 0-100

Contrast – 0-100

Saturation – 0-100

Hue – 0-100

Sharpness – 0-100

Backlight – 0-100

Color Temp – 5600K, 6500K, 9300K, User (Custom)

## Function Setup

Option to map the Up, Down, Left, Right, F1, F2, and F3 key for quick access to features.

## System Configuration

Language – English, Chinese

Guide Masks – Off, Low, Middle, High

Osd Duration – Off, 5S, 10S, 15S

Vlume – 0-100

Reset – reset to factory settings

Update – used to update the monitor's firmware

## Specifications

Aspect Ratio	16:10
Backlight	LED
Brightness	450 cd/m2
Contrast Ratio	1100:1
Inputs	HDMI
Outputs	HDMI
Resolution	1920 x 1200
Shipping Dimensions	3 x 14.75 x 7.75 in.
Shipping Weight	2 lb
UPC Code	847983025992
Viewing Angle	178°(89°/89°)

## Supported Video Signals Specifications

HDMI	720x576i & 720x576p @ 50 Hz 1280x720p @ 50 Hz 1920x1080i @ 50 Hz 1920x1080psf @ 24, 25, 29.97, 30 Hz 1920x1080p @ 23.97, 24, 25, 29.94, 30, 50 Hz 3840x2160p @ 24, 25, 30 Hz 4096x2160p @ 24 Hz
------	---

## Optional Accessories

Some other products that work well with the D7C available from Ikan include:

- MA207** 7 in. Articulating Arm
- MA211** 11 in. Articulating Arm
- MA211-R** 11 in. Articulating Arm w/ Single Rod Mount

## Learn More

More dynamic information at official website: [www.ikancorp.com](http://www.ikancorp.com)

## Support

Contact email: [support@ikancorp.com](mailto:support@ikancorp.com)

---

### CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

**Free Service will not be provided in the following situations: (\*Even if the product is still within the warranty period.)**

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.

©2018 Ikan Corporation. All rights reserved

