


**F3**


---

**(Friction Follow Focus) QUICKSTART GUIDE**

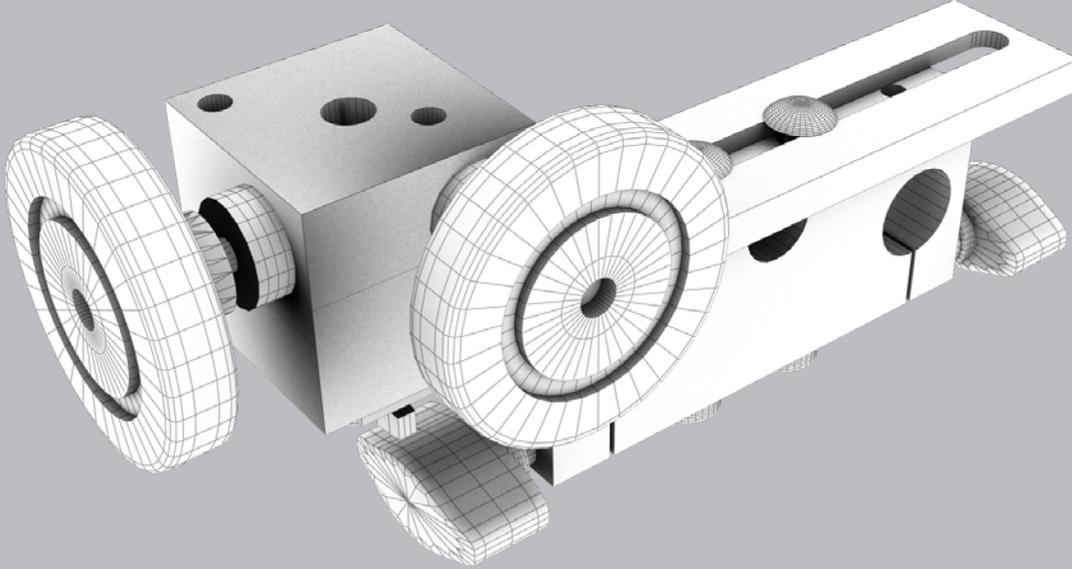


---

**Whats included**

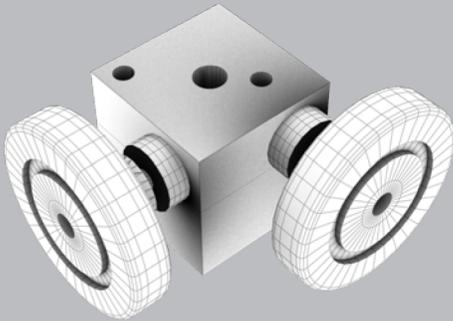


Gear box with wheels and riser

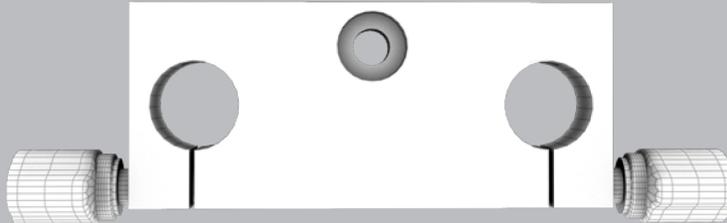


ELE-15m  
15mm rod mount

Follow Focus  
adjustment plate

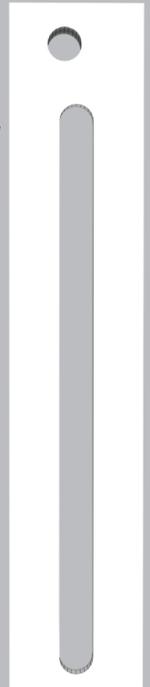


**F3**


# (Friction Follow Focus) QUICKSTART GUIDE

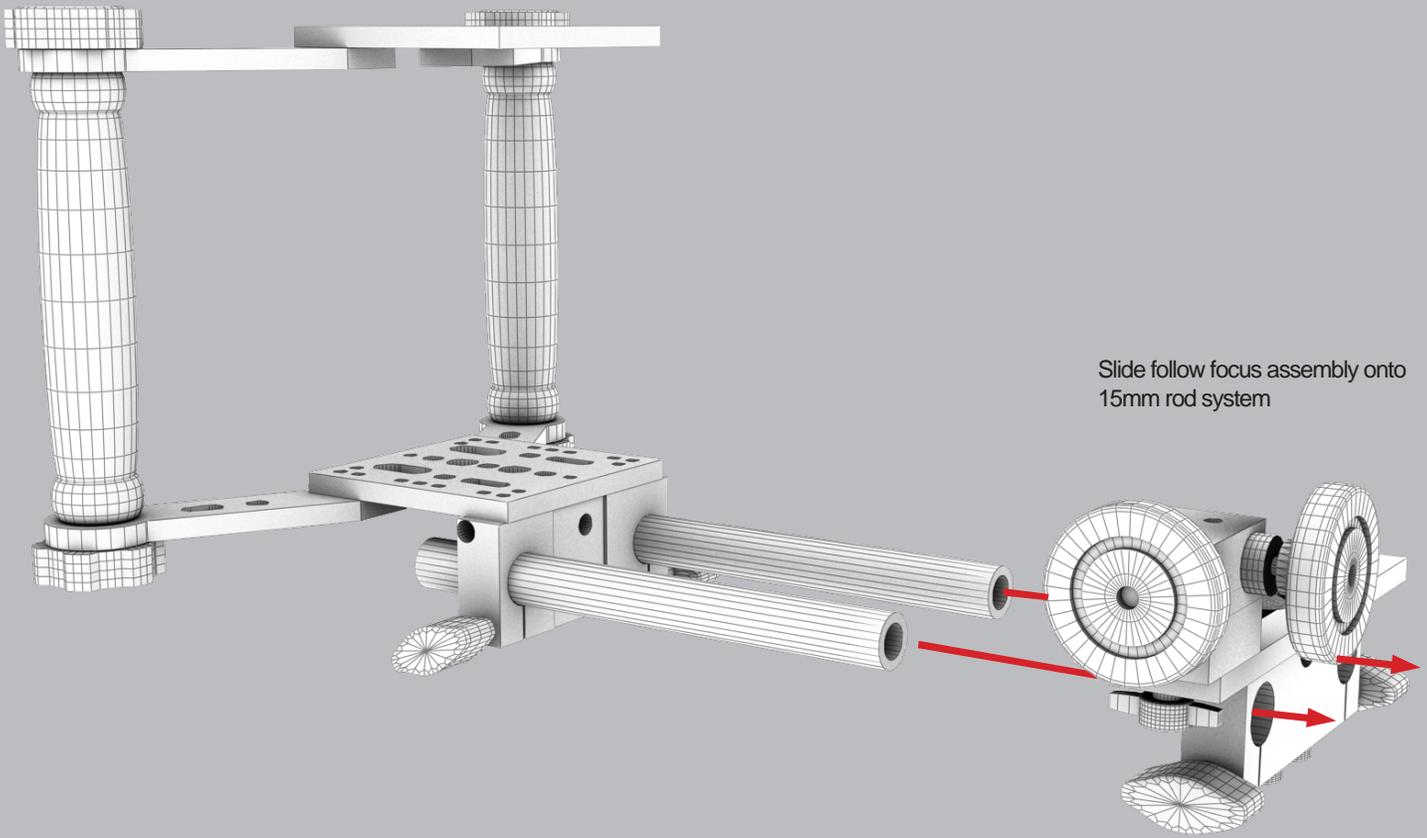

## Gear box rotates to adjust for lens size

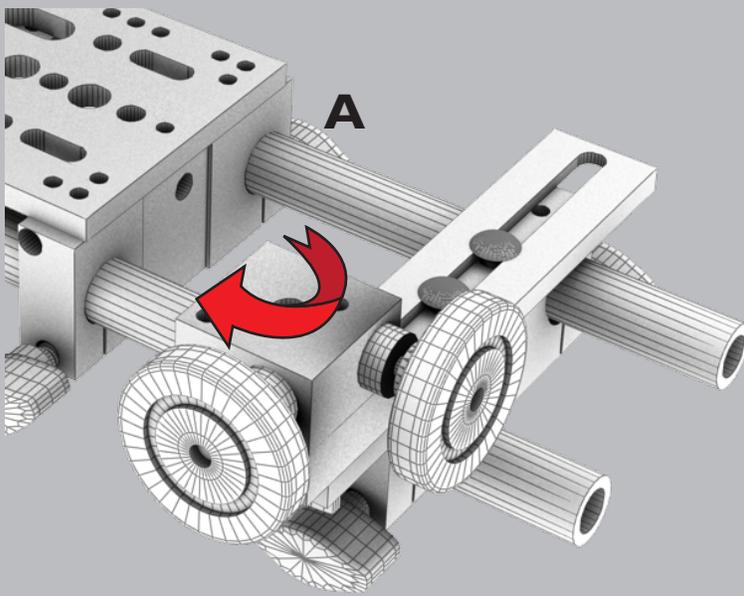

For longer lenses, keep focus wheel towards the front

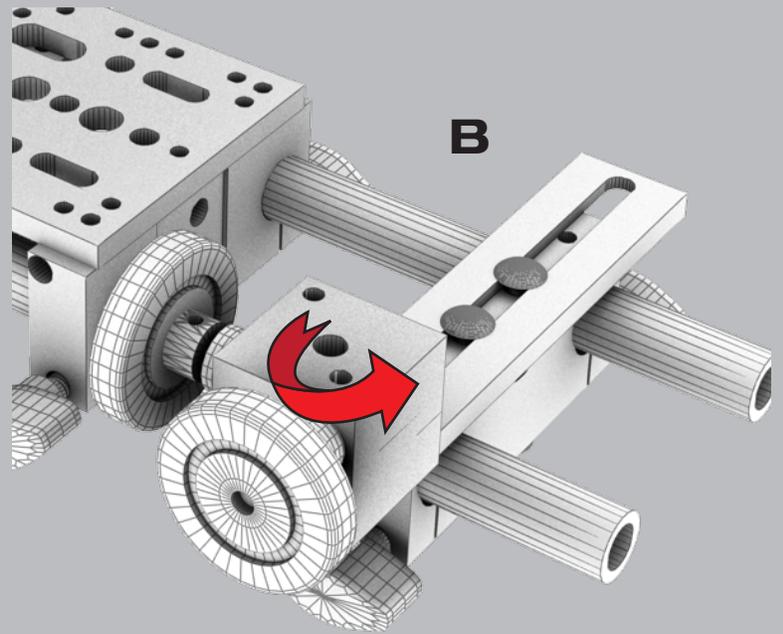

For shorter lenses, rotate the focus gear box to be closer to the camera body.

**ikan**


[www.ikancorp.com](http://www.ikancorp.com)

713-272-8822

# F3

## (Friction Follow Focus) QUICKSTART GUIDE

(Less pressure on the wheel works best.)

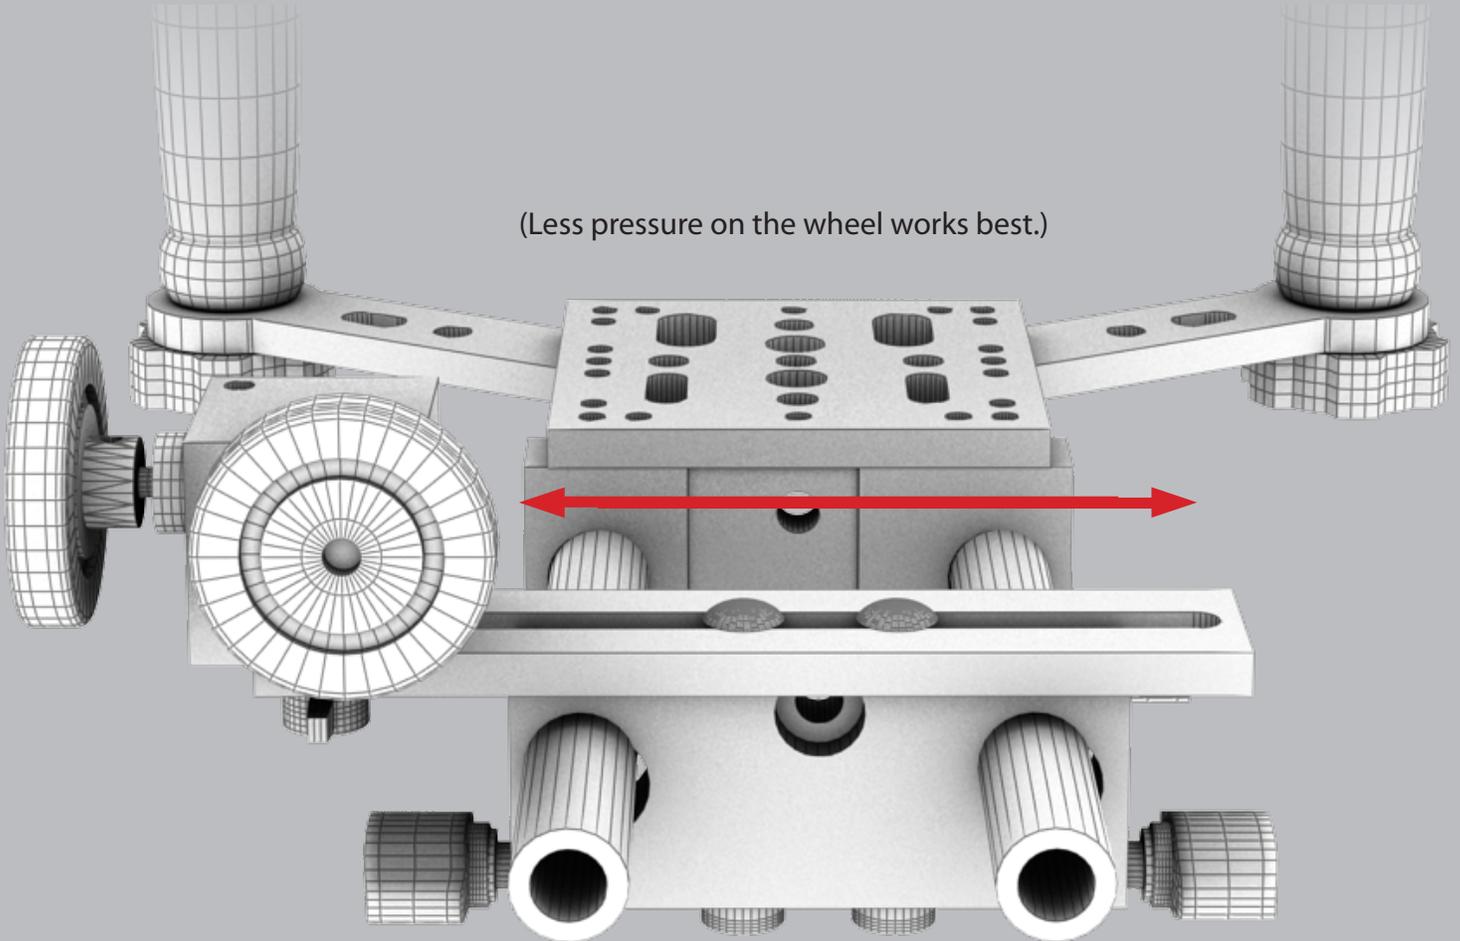

Gear box assembly can be adjusted as close to the lens as need be. The focus wheel should be snug enough against the lens focus ring that when turning the handle wheel, it will rotate the focus ring of the lens. The F3 is designed to work with most lightweight lenses. If the focus wheel fails to catch because the lens is too large in diameter or heavy, it is recommended that a geared focus option be utilized.

### CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period has expired.

Free Service will not be Provided in the Following Situations: (\*\* Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors etc.