



Features

- Convenient Tripod & Dolly Kit for PTZ Camera Setups
- Extra-Tall Tripod Legs with Geared Rising Center Column
- Height Range w/ Dolly: 38.9" – 98.3"
- Max Payload Capacity: 26.5 lbs.
- Built-in Mid-Level Spreader
- Retractable Foot Spikes for Soft Ground
- P6 Includes Adjustable Ratcheted Release Screw
- Plate Includes 1/4"-20 and 3/8"-16 Mounting Screws and Registration Pin
- Includes Stone Bag

GA230 Pro Geared Video Tripod

The E-IMAGE GA230 tripod with geared center column is extremely solid and wobble free. Geared center column provides extra height if you need to get your camera high up, filming sports or events. It includes built-in bubble level, rubber feet with retractable spikes can be used on uneven ground. A mid-level spreader and a padded carrying case are included with the tripod.



Flat base.



Parking holes for accessories.
(Monitor, LED light.....)



High quality aluminum tube.



With Geared adjustable center column, the max height of tripod can reach up to 2.3m.



Super locking structure, the ergonomic design allows for quick height adjustments.



Adjustable tripod feet to meet different ground conditions.

Specifications:

Payload	12.0kg / 26.4lbs
Height range	84.0-230.0cm / 33.1-90.6in
Transport length	89.0cm / 35.0in
Net weight	4.8kg / 10.6lbs
Bowl size	Flat base
Sections	3
Material	Aluminum




Tripod belt



ST-1 Stone bag

P6 Quick Release Plate

Quick release adapter with plate.

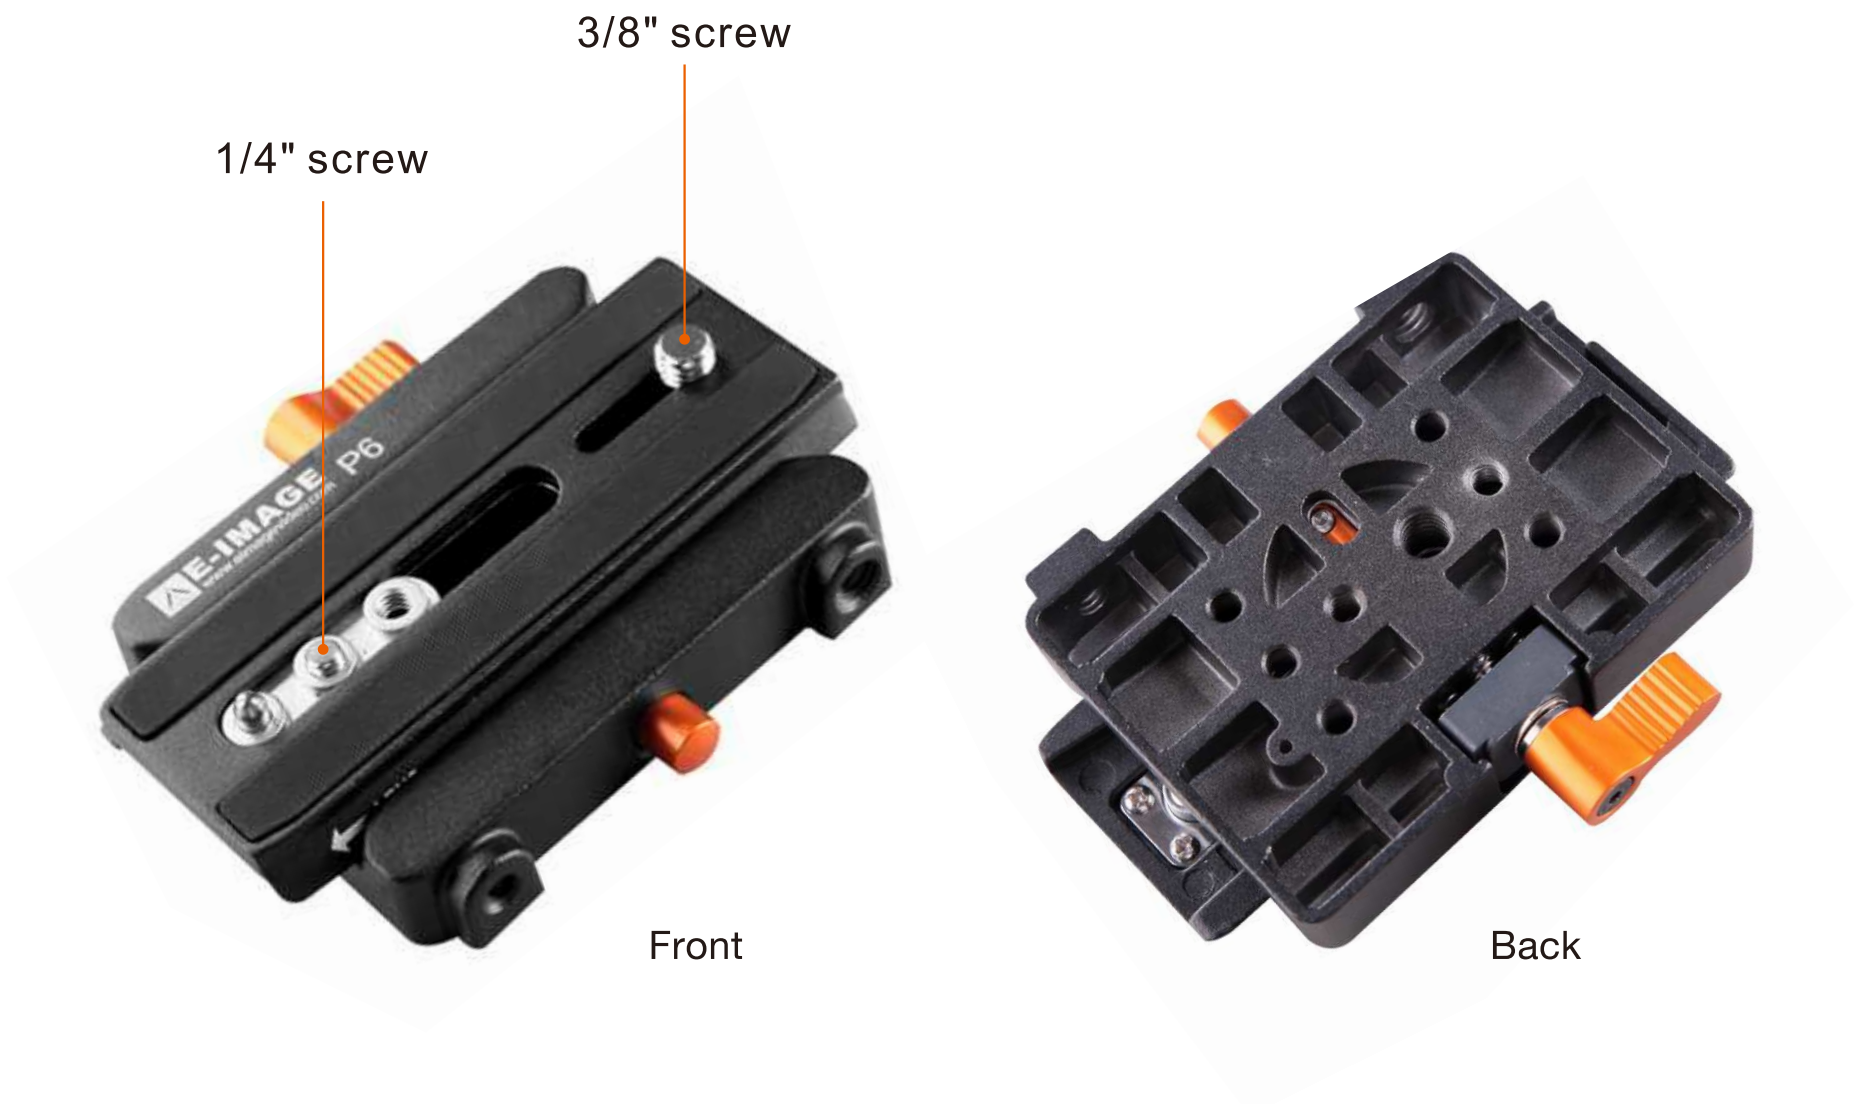

Specifications:


Size(LxWxH)	120x100x25mm / 4.7x3.9x1.0in
Net weight	305g / 0.7lbs

EI-7003C Universal Dolly


It comes with fully adjustable leg locks to fit almost all full-size tripods, not only the horseshoe feet but also the nail feet and rubber feet. It features on-step easy lock, locking wheels to secure the tripod.



Leg setting rubber.

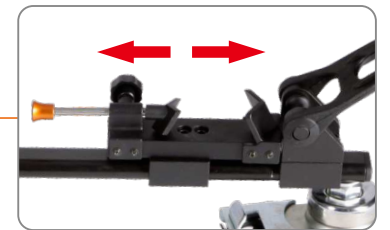

Single-point foot mounts are adjustable along dolly arm for small and large tripods.



Pull the knob to extend the dolly, easy to go out.



The rubber wheels are non-marring during normal use, protecting the floor surface.



Each wheel incorporates its own foot-activated brake.



High quality aluminum tube.



Specifications:

Payload	40.0kg / 88.0lbs
Net weight	3.9kg / 8.6lbs
Footprint dia.	100cm / 39.4in
Casters dia.	75mm / 3.0in
Working height	14.5cm / 5.7in