GA752SD-PTZ



Aluminum Tripod, Dolly, 75mm Flat Base, & Quick Release Plate for PTZ Cameras



Features

- Convenient Tripod & Dolly Kit for PTZ Camera Setups
- Height Range (w/ Dolly): 67.1" 30.9"
- Max Payload: 66 lb.
- Plate Mountable from Rear or Front
- Plate Includes Safety Locks and Safety Release
- Plate Includes 1/4"-20 and 3/8"-16 Mounting Threads
- 2-Stage/3-Section
- Includes Mid-Level Spreader
- Removeable Rubber Feet
- Retractable Foot Spikes for Soft Ground





GA752S 75mm Video Tripod

The E-IMAGE GA752S tripod legs are the lightweight version of the incredibly popular GA752. The GA752S has locks on each stage of each leg and includes a GS01 mid-level spreader for added stability. Each leg also ends in a two-pronged spike for biting into soft ground, and each spike comes covered with a rubber foot to protect delicate surfaces.



Specifications:

Payload	30.0kg / 66.0lbs
Height range	64.0-156.0cm / 25.2-61.4in
Transport length	74.0cm / 29.1in
Net weight	2.6kg / 5.7lbs
Bowl size	75mm
Sections	3
Material	Aluminum



75BF 75mm Bowl to Flat Adapter

75mm bowl to flat adapter convert all E-IMAGE 75mm bowl tripods to flat base.



Specifications:

Flat base height

105mm / 4.1in


Net weight

250g / 0.6lbs



EI-7003 Basic Dolly

Designed for light and medium weight tripods. The 76mm/3 inch wheels have a sure-lock feature and can be individually braked. Folds for transporting.

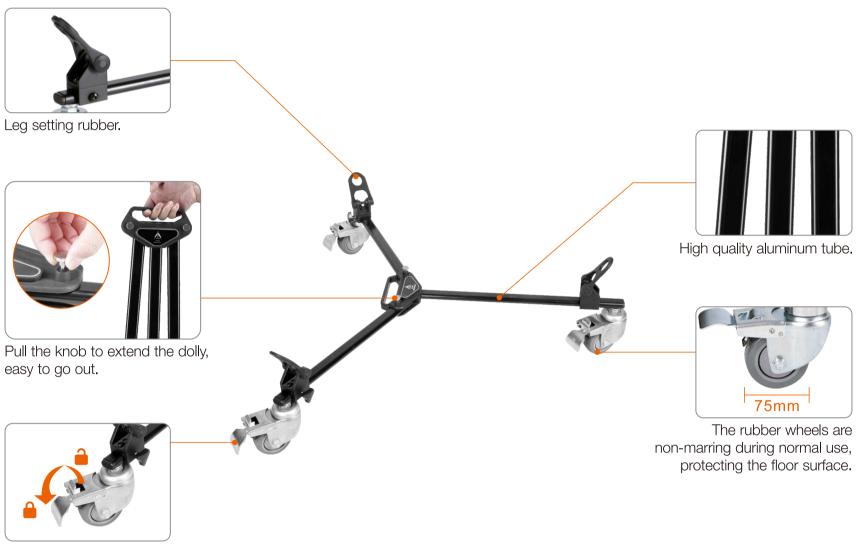

Each wheel incorporates its own foot-activated brake.


Specifications:

Payload	40.0kg / 88.0lbs
Net weight	3.5kg / 7.7lbs
Footprint dia.	100cm / 39.4in
Casters dia.	75mm / 3.0in
Working height	14.5cm / 5.7in



P6 Quick Release Plate

Quick release adapter with plate.

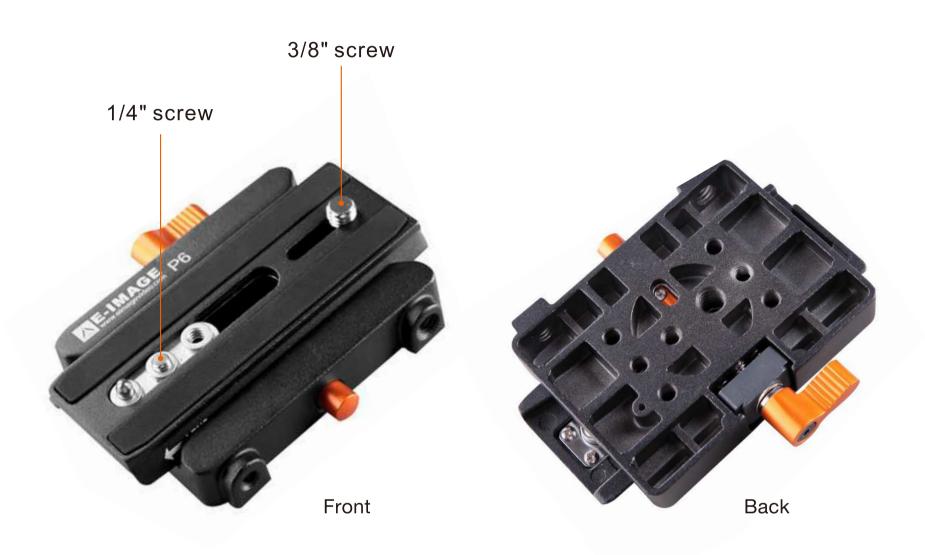

Specifications:

Size(LxWxH)

120x100x25mm / 4.7x3.9x1.0in

Net weight

305g / 0.7lbs