

IDMX1500-v2

1500 LED Studio Light w/ Digital DMX Control

QUICK START GUIDE



What's Included

- 1 x IDMX1500-v2 LED Light
- 1 x AC Adapter
- 1 x Safety Chain
- 1 x Power Cord

CHECKED BY

ikan

www.ikancorp.com

support@ikancorp.com

713.272.8822

© 2015 ikan Corporation. All rights Reserved


IDMX1500-v2

Getting Started

1. Power on the light using the Main Power switch
2. Control the amount of light with the Dimmer Knob clock-wise until you hear a "click".
3. Turn the light off by twisting the Dimmer Knob counter clock-wise until you hear a "click".
4. The IDMX1500-v2 can also be powered by the included AC adapter.

Adjusting the Brightness

The Dimmer Knob on the back of the light allows you to adjust the intensity of the light. Adjust the intensity of the light by turning the Dimmer Knob clock-wise to increase the intensity and counter clock-wise to reduce it.

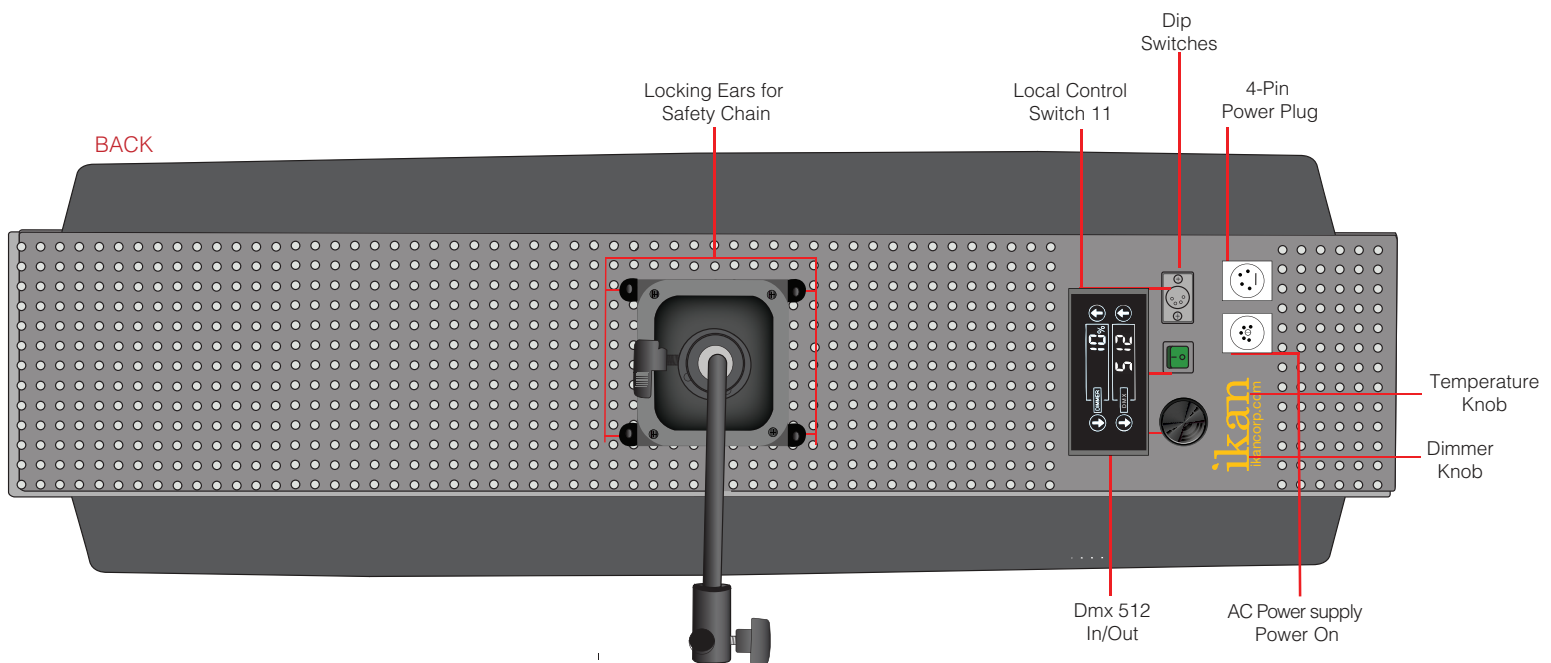

Attention:
If not using DMX, make sure that
DIP Switch #11 is in the ON position.

IDMX1500-v2

Specifications

Product Specs	
Beam Angle	60° Wide Angle
Brightness	3 ft / 5749 lux / 5600K
Build Material	Metal & Aluminum
Color Temperature	3200K - 5600K
Control	DMX & Local Knob
Cooling System	Passive Heat Sync
Fixture Size	2" x 7" x 39"
Lens	60°
Mount	Ball Mount
Operating Volts	24v
Power Supply	24v @ 5 Amps
Rating	24v
Shipping Dimensions	8" x 11" x 42"
Weight	11 lbs
Shipping Weight	15 lbs

Learn More

More dynamic information at official website: www.ikancorp.com

Support

Contact email: support@ikancorp.com

CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

Free Service will not be Provided in the Following Situations:(*Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.