


IDMX1500B

1500 LED Light w/ DMX Control QUICKSTART GUIDE

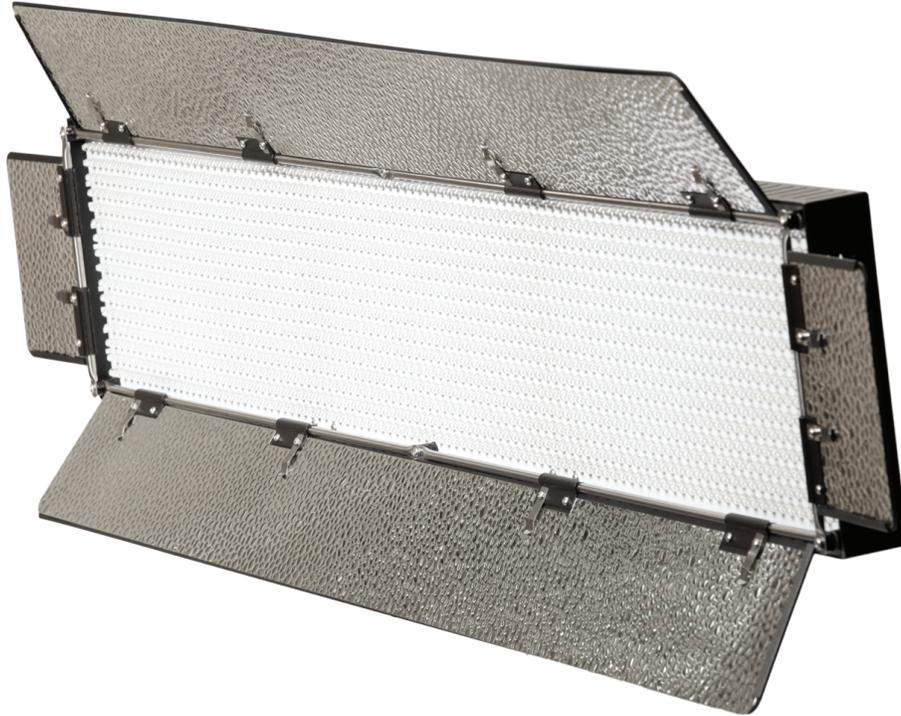

What's included

- IDMX1500 LED Light
- AC Adapter
- Safety Cable

Checked by

CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period has expired.

Free Service will not be Provided in the Following Situations: (* Even if the product is still within the warranty period.)


- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors etc.

IDMX1500B

1500 LED Light w/ DMX Control QUICKSTART GUIDE

Attention:

If not using DMX, make sure that DIP Switch #11 is in the ON position.

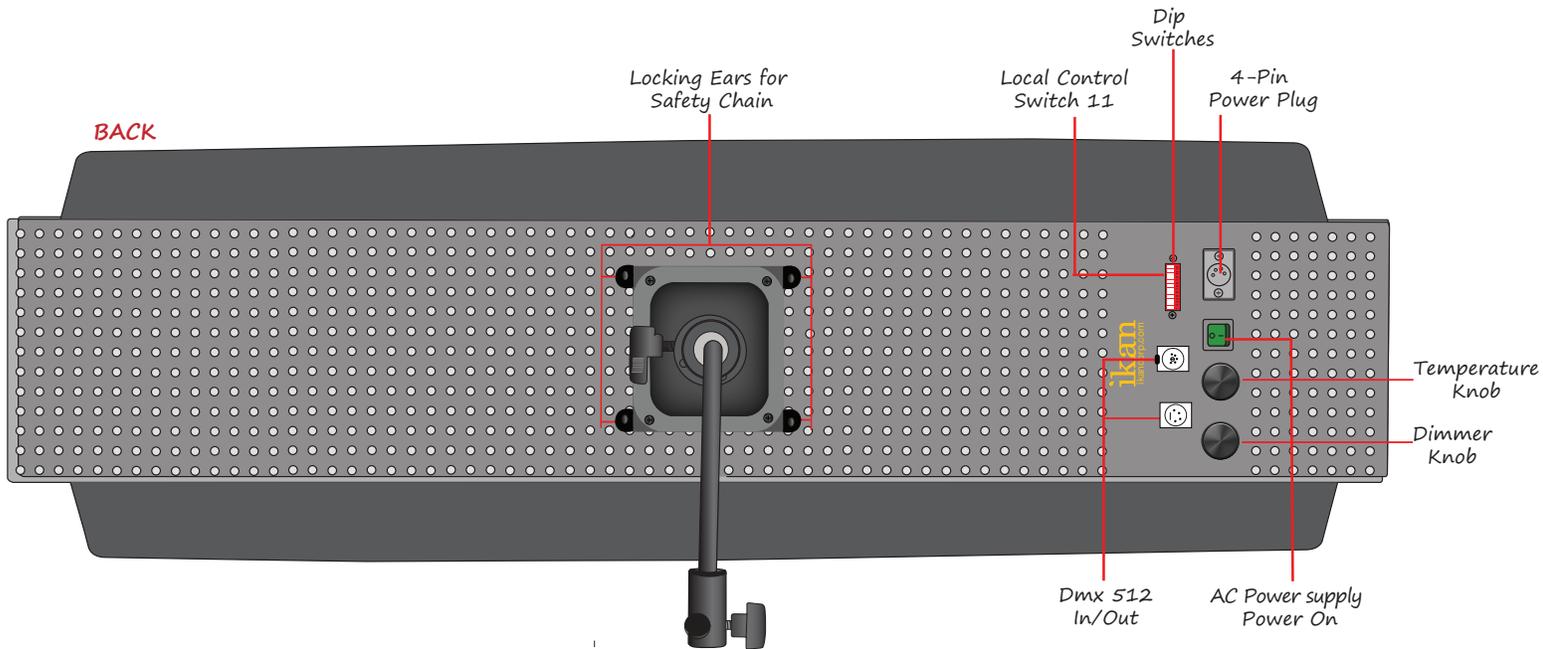

GETTING STARTED

1. Power on the light using the Main Power switch
2. Control the amount of light with the Dimmer Knob clock-wise until you hear a “click”.
3. Turn the light off by twisting the Dimmer Knob counter clock-wise until you hear a “click”.
4. The IDMX1500 can also be powered by the included AC adapter.

ADJUSTING THE BRIGHTNESS

The Dimmer Knob on the back of the light allows you to adjust the intensity of the light. Adjust the intensity of the light by turning the Dimmer Knob clock-wise to increase the intensity and counter clock-wise to reduce it.

SPECIFICATIONS

Operating Volts:	24V
Color Temperature:	3200 K - 5600 K
Brightness:	3 ft. / 5749 lux / 5600 K
Dimension:	38.9” x 7.3” x 1.6”
Weight:	7.5 lbs

IDMX1500B

1500 LED Light w/ DMX Control QUICKSTART GUIDE

DIP Switch Chart

Dial Switch	Dial Switch ON/OFF Station								DMX Console Adjustment
Binary code	8	7	6	5	4	3	2	1	
00000000	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	1-1(brightness),1-2(color temp)
00000001	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	1-3(brightness),1-4(color temp)
00000010	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	1-5(brightness),1-6(color temp)
00000011	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	1-7(brightness),1-8(color temp)
00000100	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	1-9(brightness),1-10(color temp)
00000101	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	1-11(brightness),1-12(color temp)
00000110	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	1-13(brightness),1-14(color temp)
00000111	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	1-15(brightness),1-16(color temp)
00001000	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	2-1(brightness),2-2(color temp)
00001000	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	3-1(brightness),3-2(color temp)
00010000	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	5-1(brightness),5-2(color temp)
00100000	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	9-1(brightness),9-2(color temp)
01000000	ON	OFF	17-1(brightness),17-2(color temp)						