




Instructions




Operating steps.




Operating steps.




Assemble the handle.



Adjust the tilt drag.




Lock the tilt locking knob.




Lock the pan locking knob.


Instructions




Camera can be attached to the monopod directly.




Loose the Wing locking knob, the monopod can swivel 360° and be tilted in any direction.



Push the block to adjust the mini leg angle.




Open the flip locking to expand or collapse monopod tube.

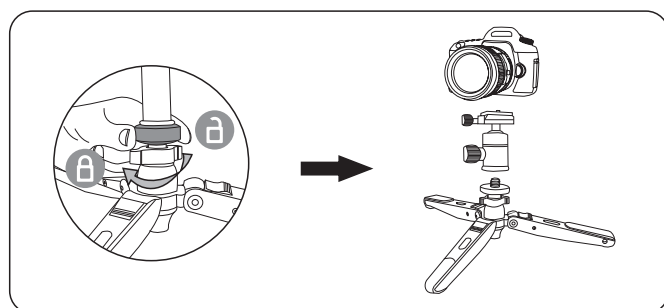

Loose the bottom base of monopod to remove the monopod, the mini leg can be acted as a mini tripod, make low angle shooting.

In the box

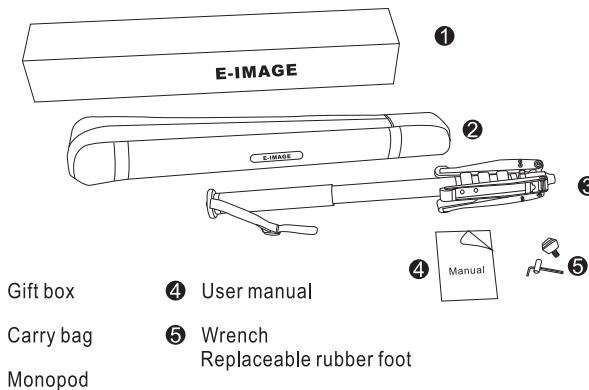

- ① Gift box
- ② Carry bag
- ③ Monopod
- ④ User manual
- ⑤ Wrench
- ⑥ Replaceable rubber foot

Notice & Warning

Always engage safety locks and devices where applicable on the products.

Don't use product at temperatures less than -30° or more than -60°. Cleaning with mild detergent and s soft cloth. Remove dust and sand from all locking threads and sliding segments.

Dry the product after use in wet conditions.

IMPORTANT: Not recommended to use in seawater.

If any questions during using process, please read the instruction carefully or ask help from your local distributor.

In the event on the product becoming defective, the unit should be returned to an authorized E-IMAGE service agent.

NINGBO EIMAGE STUDIO EQUIPMENT CO., LTD

Address: No.373 South Hangyong Rd, Luotuo Industry zone, Zhenhai, Ningbo, China. 315202

Tel: 86-574-55681753, 86-574-55681675

Fax: 86-574-86590078


E-mail: sales@eimagevideo.com

Visit www.eimagevideo.com for more information




The magic life in the image world
E-IMAGE

Fluid Monopod Instruction

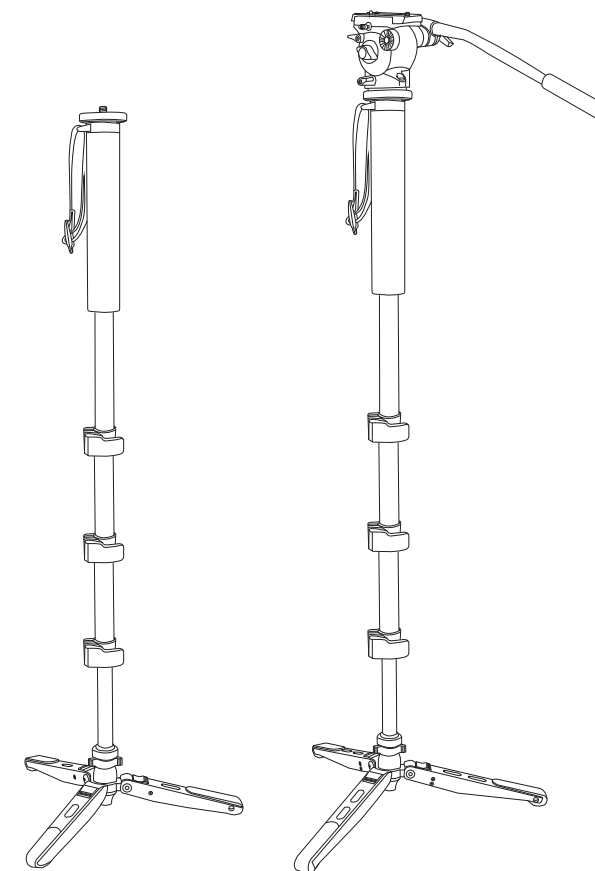

www.eimagevideo.com

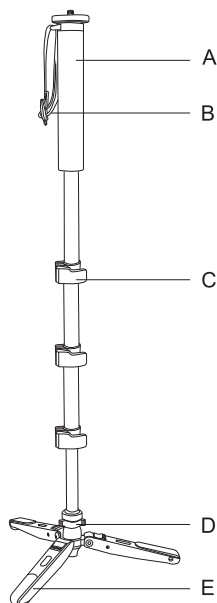


MA600
MC600

- A: Monopod spong cover
B: Wrist strap
C: Flip lock
D: Wing locking knob
E: Aluminium leg support

MA800
MC800

- A: Monopod spong cover
B: Wrist strap
C: Flip lock
D: Wing locking knob
E: Aluminium leg support

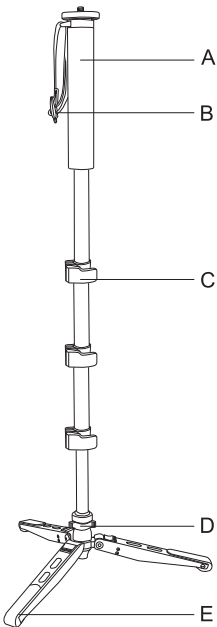


Specifications

Model No.	MA600	MC600
Material	Aluminum	Carbon fiber
Max.Height	190cm/74.8in	190cm/74.8in
Payload	20kg/44.1lb	20kg/44.1lb
Net Weight	1370g/3.0lb	1190g/2.6lb
Folded Height	64cm/25.2in	64cm/25.2in

Specifications

Model No.	MA800	MC800
Material	Aluminum	Carbon fiber
Max.Height	201cm/79.1in	201cm/79.1in
Payload	20kg/44.1lb	20kg/44.1lb
Net Weight	1560g/3.4lb	1370g/3.0lb
Folded Height	68cm/26.8in	68cm/26.8in

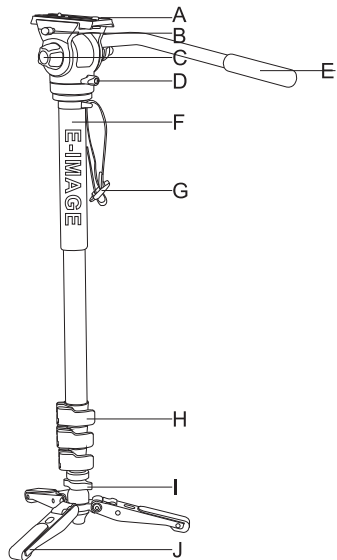


MA600+610FH
MC600+610FH

- A: Plate
B: Plate release button
C: Tilt lock
D: Pan lock
E: Non-slip handle sponge cover
F: Monopod spong cover
G: wrist strap
H: Flip lock
I: Wing locking knob
J: Aluminium leg support

MA800+630FH
MC800+630FH

- A: Plate
B: Plate release button
C: Tilt locking knob
D: Tilt drag adjusting knob
E: Tilt locking knob
F: Non-slip handle sponge cover
G: Monopod spong cover
H: wrist strap
I: Flip lock
J: Wing locking knob
K: Aluminium leg support

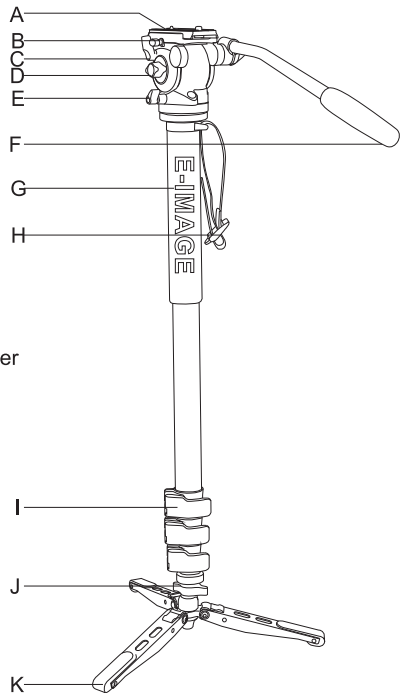

Specifications

Model No.	MA600+610FH	MC600+610FH
Material	Aluminum	Carbon fiber
Max.Height	201cm/79.1in	201cm/79.1in
Payload	3kg/6.6lb	3kg/6.6lb
Net Weight	2210g/4.9lb	2030kg/4.5lb
Folded Height	75cm/29.5in	75cm/29.5in

Specifications

Model No.	MA800+630FH	MC800+630FH
Material	Aluminum	Carbon fiber
Max.Height	213cm/82.7in	213cm/82.7in
Payload	4kg/8.8lb	4kg/8.8lb
Net Weight	2820g/6.2lb	2620g/5.8lb
Folded Height	80cm/31.5in	80cm/31.5in