
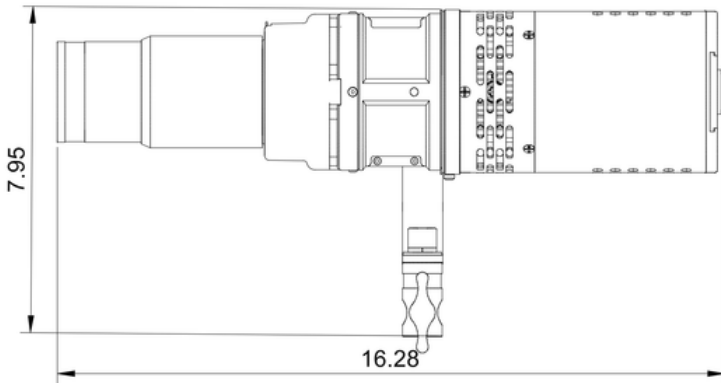


Lyra POE Bi-Color 30 Degree Ellipsoidal LED Light w/ ArtNet and sACN DMX

The Ikan LBERS60-POE-30 is a PoE-powered ellipsoidal (ERS) light designed for professional studios and stages. Using a single Ethernet (RJ45) cable for power and DMX control via PoE+, it features a 30° fixed-beam lens tube that delivers wider, shorter-throw output with crisp, controllable edges. This makes it ideal for broader key lighting, area coverage, and gobo projection where larger pools of shaped light are needed. The aluminum yoke ensures stable positioning during adjustments, maintaining professional reliability. (Patented)



Physical Data	
Beam Angle	30 Degrees
Fixture Dimensions	14.3 x 4.2 x 5.8 in. / 36.3 x 10.57 x 14.7 cm
Fixture Weight	2.7 lbs / 1.2 kg
Illumination Dimensions	2.25" Diameter
Mechanical Data	
Build Material	Heavy Duty Resin Plastic / Metal
Lens	60 Degree with 30 Degree Add On
Mounting	Yoke, Supports Standard Stage Clamps
Stand Use	Baby 5/8" & Junior 1-1/8" Combo Pin
Barn Doors	N/A
Electronical Data	
Power Input	110-220VAC
Operating Voltage	48VDC
Frequency	50/60 Hz
Max Power Consumption	60 W
Color Temperature	Bi-Color 2700K-6500K
Power Loss	Last Scene Hold
LED Type	CoB LED
CRI	97
TLCI	99
Power Supply	Input: 110-220VAC; Output: 48VDC @1.25A (Not Included)
Functionality	
Input/Output Ports	RJ45, USB Type C, Threaded Barrel Coaxial (Power)
DMX	ArtNet or sACN
Dimming Range	0 - 100%
Cooling	Passive
LED Lifetime	70,000 Hours
Display	LCD Screen
Environmental Data	
Operation Temperature	10 - 110 °F

Distance	FC	LUX	Diameter
5600K			
5ft. / 1.5m	227	2450	22"
10ft. / 3m	54	579	45"
15ft. / 4.5m	18.5	22	69"
3200K			
5ft. / 1.5m	188	2020	22"
10ft. / 3m	45	486	45"
15ft. / 4.5m	18.5	199	69"