


## Lyra POE Low Profile RGBWA Studio Panel Soft LED Light w/ ArtNet and sACN DMX

The Ikan LCX8-POE is a cutting-edge and compact RGBWA soft panel LED light designed for studios, conference rooms, classrooms, and any space with low ceiling clearance. With dedicated Red, Green, Blue, White, and Amber channels, it delivers everything from broadcast-accurate whites and natural skin tones to saturated accent colors and dynamic mood lighting — perfect for branded sets, virtual production, and creative effects. Engineered for easy installation, this light is simultaneously powered (via PoE++) and DMX controlled (via ArtNet or sACN) through a single Ethernet (RJ45) cable. (Patent)

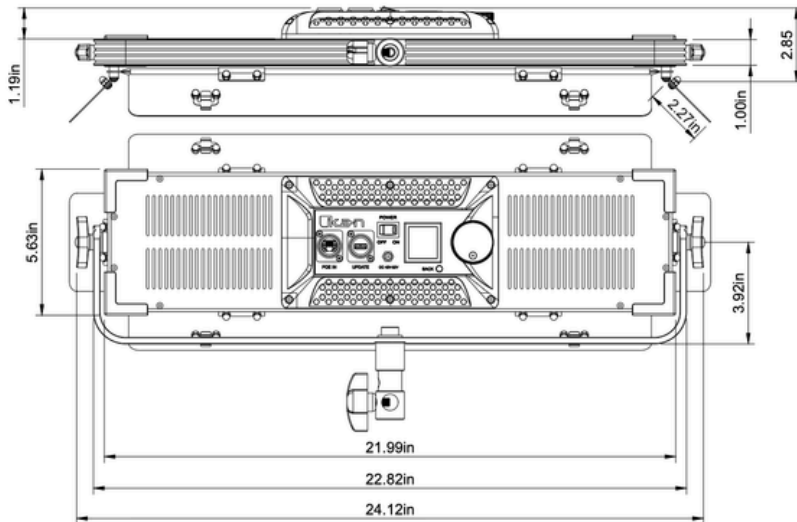

### Photometrics

Distance	FC	LUX
<b>5600K</b>		
5ft. / 1.5m	58	626
10ft. / 3m	16.4	177
15ft. / 4.5m	8.12	87.5
<b>4400K</b>		
5ft. / 1.5m	57.6	617
10ft. / 3m	16.3	175
15ft. / 4.5m	7.97	85.8
<b>3200K</b>		
5ft. / 1.5m	51.3	548
10ft. / 3m	14.8	160
15ft. / 4.5m	7.43	80

Physical Data	
Beam Angle	110 Degree
Fixture Dimensions	24.5 x 7 x 1.9 in. / 62.2 x 17.8 x 4.8 cm
Fixture Weight	4.9 lbs / 1.8 kg
Illumination Dimensions	20 x 4 in. / 50.8 x 10.2 cm
Mechanical Data	
Build Material	Heavy Duty Resin Plastic / Metal
Lens	1/2 Stop Soft Diffusion Panel
Mounting	Yoke, Supports Standard Stage Clamps
Stand Use	Baby 5/8" & Junior 1-1/8" Combo Pin w/ 90 Degree Offset
Barn Doors	Installed
Electronical Data	
Power Input	110-220VAC
Operating Voltage	48VDC
Frequency	50/60 Hz
Max Power Consumption	50 W
Color Temperature	Bi-Color 3200K-5600K, RGBWA
Power Loss	Last Scene Hold
LED Type	Chip LEDs
CRI	98
TLCI	99
Power Supply	Input: 110-220VAC; Output: 48VDC @1.25A (Not Included)
Functionality	
Input/Output Ports	RJ45, USB Type A, Threaded Barrel Coaxial (Power)
DMX	ArtNet or sACN
Dimming Range	0 - 100%
Cooling	Passive
LED Lifetime	70,000 Hours
Display	LCD Screen
Environmental Data	
Operation Temperature	10 - 110 °F