

EP880XK Pedestal Kit

The EP880XK is an integrated two-stage pneumatic pedestal kit, provides more smooth drive system for both studio and location broadcast needs, consists of EIMAGE's GH40 PLUS fluid head and EP880X pedestal. Its payload up to 40kg(88lbs) and working height adjustment from 124.6 cm to187.0cm(49.1in-73.6in).



Specifications:

Payload	40.0kg / 88.0lbs
Height range	124.6-187.0cm / 49.1-73.6in
On-shot stroke	38.0cm / 15.0in
Net weight	46.5kg / 102.3lbs
Bowl size	150mm


What's included:

Head	GH40 PLUS
Pedestal	EP880X
Dolly	EI-7008
Packing	Head (Box packing), Pedestal (Aluminum case), Dolly (Box packing)



EP880X Pedestal


The EP880X pneumatic pedestal provides stability, smoothness and jerk-free operation. It includes an air pressure gauge, locking brake, safety latch and safety air pressure valve. The sturdy foldable dolly has position track lock, foot operated brake and cable guard on each of the 125mm wheel to provide smooth movements in any desired direction. Also, an additional hand pump is equipped for the air be set in manually.



Compatible with 150mm fluid head.



A safety latch for locking the column when fully collapsed during the transportation.

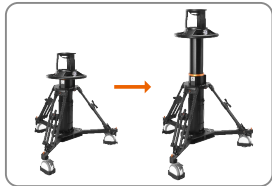

Two-stage pneumatic column provides max height 164.2cm(64.6inch).



High-Quality Dual carbon fiber legs.



Each wheel features a six-position track lock for angle adjustment.



Adjustable air pump system with a air pressure gauge and safety valve.



Perfect balance in any desired working height with a locking brake for extra safety.



Ergonomics twist knobs provides quick & steady locking.



Durable wheels with 125mm dia, smooth & quiet movement.




Max working height

Specifications:

Model	EP880X (includes EI-7008 dolly)
Payload	50.0kg / 110.0lbs
Height range	101.8-164.2cm / 40.1-64.6in
On-shot stroke	38.0cm / 15.0in
Net weight	37.4kg / 82.3lbs
Bowl size	150mm
Packing	Pedestal (Aluminum case) Dolly (Box packing)

GH40 PLUS 150mm Fluid Head

The GH40 PLUS fluid head features 1-9 grades of counterbalance with micro knob for precise counterbalance. 12 steps(0-11) drag in both pan and tilt for smooth movement. Designed with tilt safety lock for camera safety. 2 types of selectable payload between 40kg and 27kg for your best setting. A built-in illuminated bubble level to assist balancing in darkness and extendable dual panhandles are included.

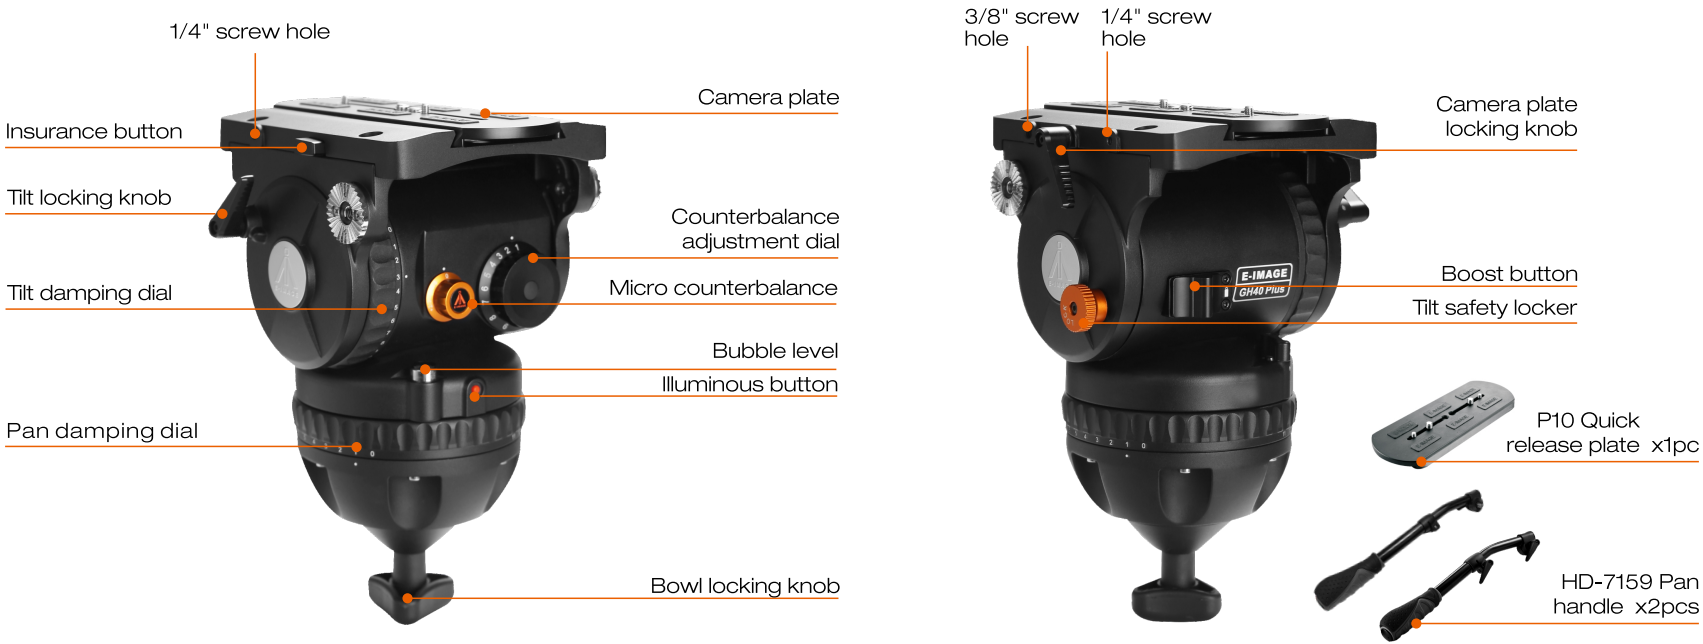

Features



0-11 grades of pan & tilt drag for smooth movement.



1-9 grades of counterbalance with micro knob for precise counterbalance.



Always keep it safety when no operation.



Switch dial knob for different payload.



P10 quick release plate with an extra 205mm (8.1in) sliding range.

Specifications

	Payload	40.0kg / 88.0lbs
	Counterbalance	1-9
	Grades of pan drag	0-11
	Grades of tilt drag	0-11

	Tilt range	-70°/+90°
	Temperature range	-40℃/+80℃
	Net weight	8.8kg / 19.4lbs
	Bowl size	150mm

Counterbalance Graph

