



## Installation Guide

### Package Contents

- 1x Tally Interface unit
- Power adapter (5V 1A)
- TriCaster connection cable

### Compatible TriCaster Models

- TriCaster 2 Elite
- TriCaster 1 Pro
- TriCaster TC1
- TriCaster TC410 Plus
- TriCaster 410, 460, 850, 855, 860, 8000

# Setup Instructions

---

## Power Connection

1. Connect the included 5V power adapter to the tally interface
2. Plug the power adapter into an AC outlet

## TriCaster Connection


1. Locate the DB15 Tally port on your TriCaster
2. Connect the included cable from the TriCaster's DB15 port to the tally interface's DB9 input

## Monitor Connections

1. Connect your Ikan monitors using standard Ethernet cables
2. Up to 4 monitors can be connected to the RJ45 output ports
3. For additional connections (up to 8), link two tally interface units together

## Operation

- The system operates in plug-and-play mode with no additional configuration required
- When a camera is selected in TriCaster, the corresponding monitor's tally light will illuminate red for Program

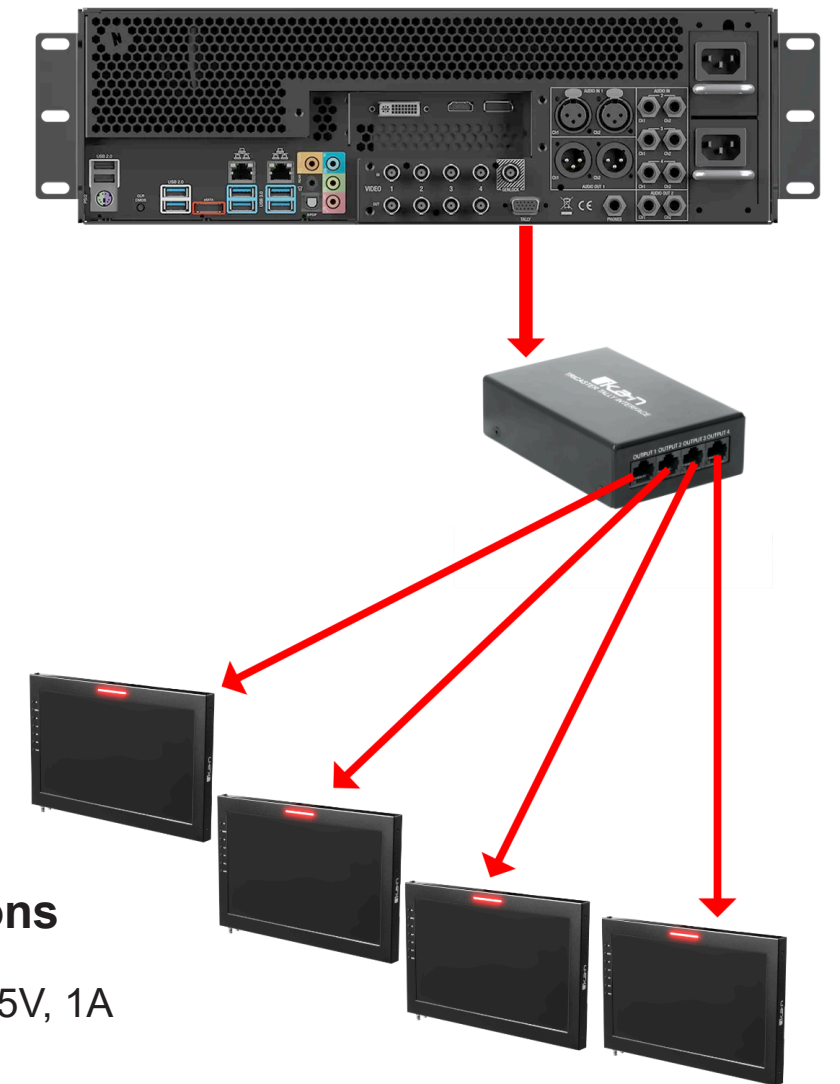

## Technical Specifications

- Power consumption: 5V, 1A
- Input connector: DB9
- Output connectors: 4x RJ45
- TriCaster connector: DB15
- Product weight: 1 lb
- Product dimensions: 4.72" x 3.30" x 1.33"

## Important Notes

- Use only standard Ethernet cables for monitor connections
- Ensure all connections are secure before operation
- Only supports program (red) tally light functionality

For technical support, contact Ikan at 713.272.8822