

V17e-FK

17 inch HD Monitor Field Kit QUICKSTART GUIDE



What's included

- | | |
|-----------------------------------------------|----------------------------------------------------------------------------------|
| <input type="checkbox"/> V17 HD Monitor | <input type="checkbox"/> AC Power Cord |
| <input type="checkbox"/> Rack Ear (Pair) | <input type="checkbox"/> SH17 Sunhood |
| <input type="checkbox"/> 9mm x 3mm Screw (8) | <input type="checkbox"/> SP17 Screen Protector |
| <input type="checkbox"/> Table Stand | <input type="checkbox"/> YK17 Monitor Yoke |
| <input type="checkbox"/> 10mm x 4mm Screw (4) | <input type="checkbox"/> Pro Battery Kit (check one): [V17PBK- A] [V17PBK-S] |

Checked by

CONDITIONS OF WARRANTY SERVICE


- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period has expired.

Free Service will not be Provided in the Following Situations: (* Even if the product is still within the warranty period.)



- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors etc.

V17e-FK

17 inch HD Monitor Field Kit QUICKSTART GUIDE

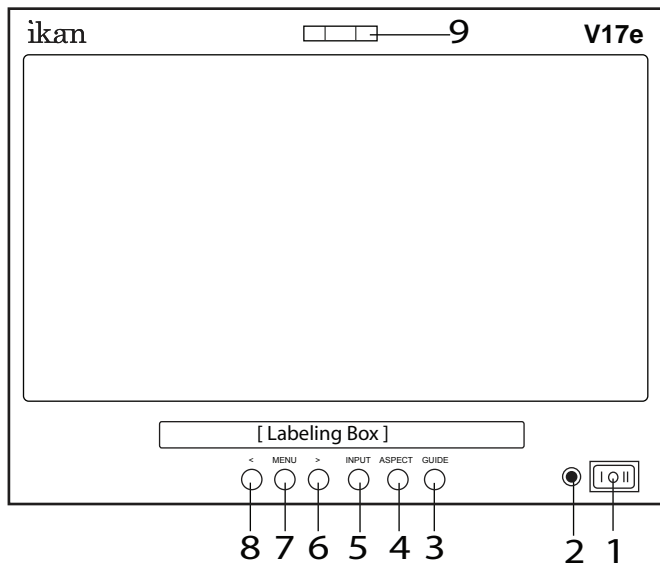

1.	POWER	Power switch (I = AC On, O = Off, II = DC On)
2.	LAMP	Power signal indicator
3.	GUIDES	On-screen guide: 4:3 or 16:9
4.	ASPECT	Aspect ratio: 4:3 or 16:9
5.	INPUT	A/V (Composite), S-Video, SD/HD Component, HDMI
6.	>	While in MENU mode, toggle as up adjust setting
7.	MENU	Access to all monitor settings: Brightness, Hue, etc.
8.	<	While in MENU mode, toggle as down adjust setting
9.	LAMP	Tally Lights

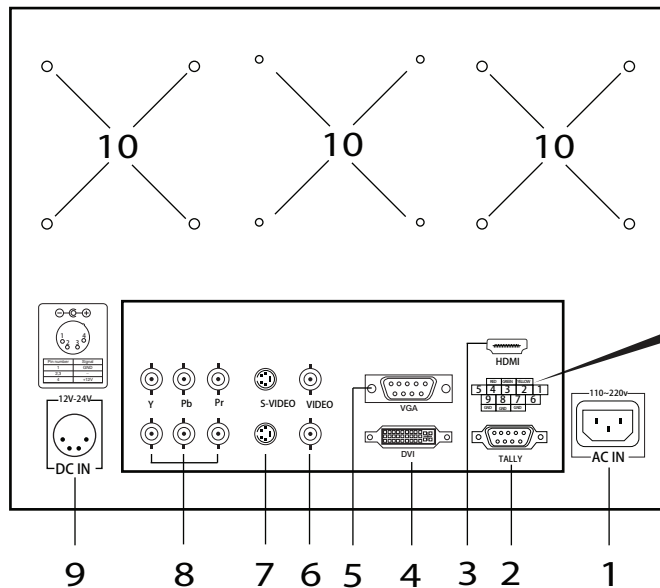

Tally Light Operation

- Do not provide power to tally connections.
- Tally light system is unpowered and works by closing the contact between any of the grounding pins and the pin for the desired LED color.

1.	AC 110V-220V Power Connection
2.	Tally
3.	HDMI Input
4.	DVI Connection
5.	VGA Connection
6.	A/V - I/O for standard definition composite signal
7.	S-Video - I/O for standard definition S-Video signal
8.	Component - I/O for standard definition, 720p, and 1080i HD signals
9.	DC 12V-24V Power Connection
10.	100mm Holes for Vesa Mount / Pro Battery Mounting Plates

V17e-FK

17 inch HD Monitor Field Kit QUICKSTART GUIDE

