

V17e

17 inch HD Monitor QUICKSTART GUIDE



What's included

- V17 HD Monitor
- AC Power Cord
- Rack Ear (Pair)
- Table Stand

Checked by

CONDITIONS OF WARRANTY SERVICE


- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period has expired.

Free Service will not be Provided in the Following Situations: (* Even if the product is still within the warranty period.)


- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors etc.

V17e

17 inch HD Monitor QUICKSTART GUIDE

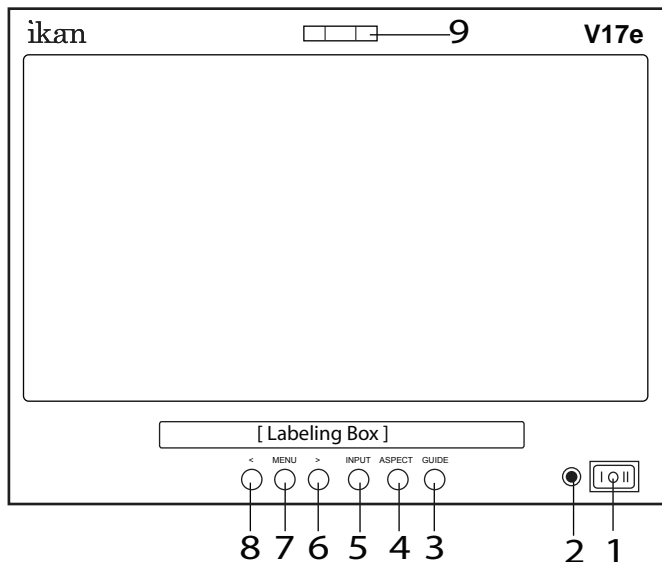

1.	POWER	Power switch (I = AC On, O = Off, II = DC On)
2.	LAMP	Power signal indicator
3.	GUIDES	On-screen guide: 4:3 or 16:9
4.	ASPECT	Aspect ratio: 4:3 or 16:9
5.	INPUT	A/V (Composite), S-Video, SD/HD Component, HDMI
6.	>	While in MENU mode, toggle as up adjust setting
7.	MENU	Access to all monitor settings: Brightness, Hue, etc.
8.	<	While in MENU mode, toggle as down adjust setting
9.	LAMP	Tally Lights

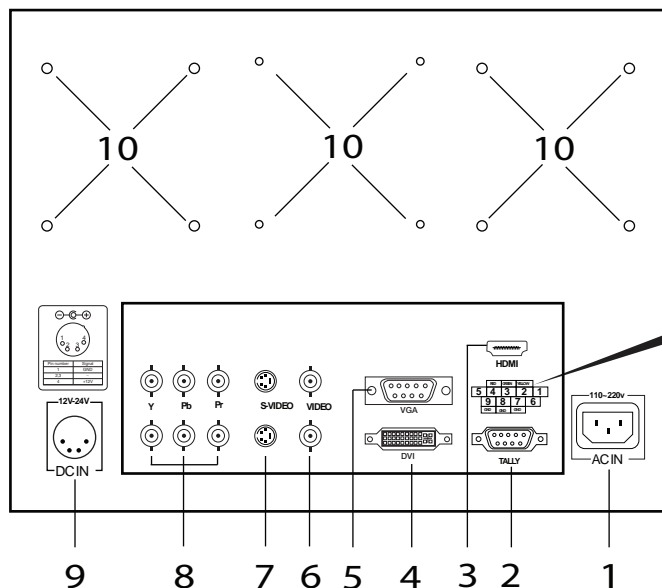

	FED	GREEN	YELLOW	
5	4	3	2	1
9	8	7	6	
	GND	GND	GND	


Tally Light Operation

- Do not provide power to tally connections.
- Tally light system is unpowered and works by closing the contact between any of the grounding pins and the pin for the desired LED color.


1.	AC 110V-220V Power Connection
2.	Tally
3.	HDMI Input
4.	DVI Connection
5.	VGA Connection
6.	A/V - I/O for standard definition composite signal
7.	S-Video - I/O for standard definition S-Video signal
8.	Component - I/O for standard definition, 720p, and 1080i HD signals
9.	DC 12V-24V Power Connection
10.	100mm Holes for Vesa Mount / Pro Battery Mounting Plates

V17e

17 inch HD Monitor QUICKSTART GUIDE

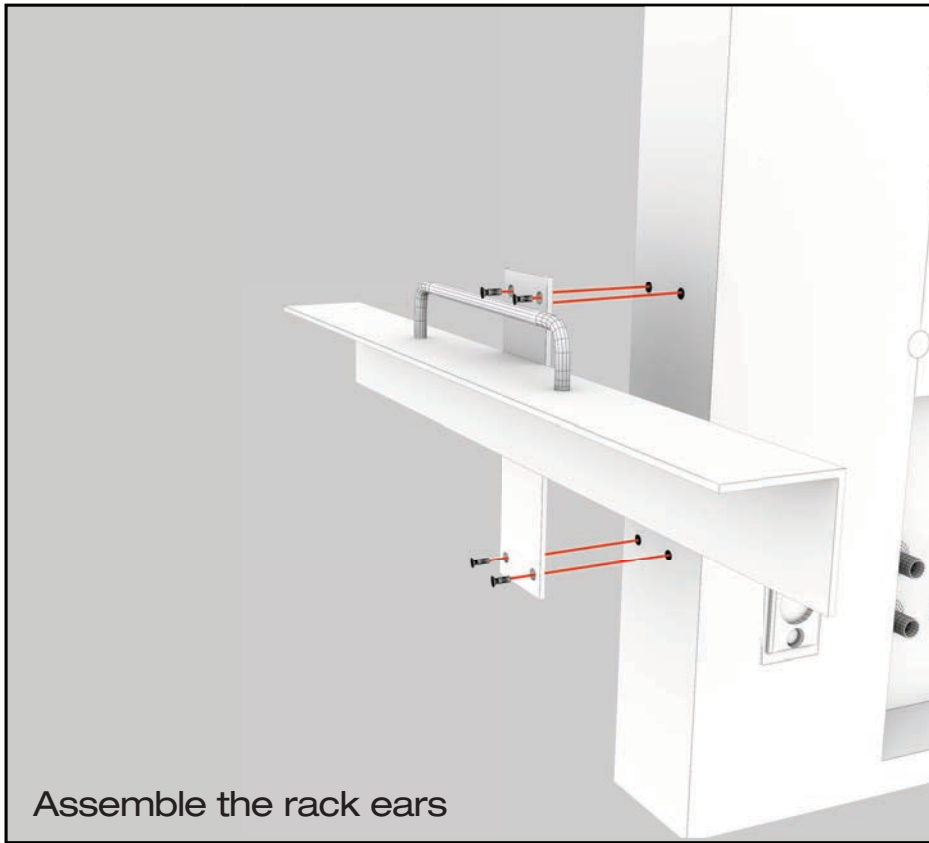

Assemble the rack ears

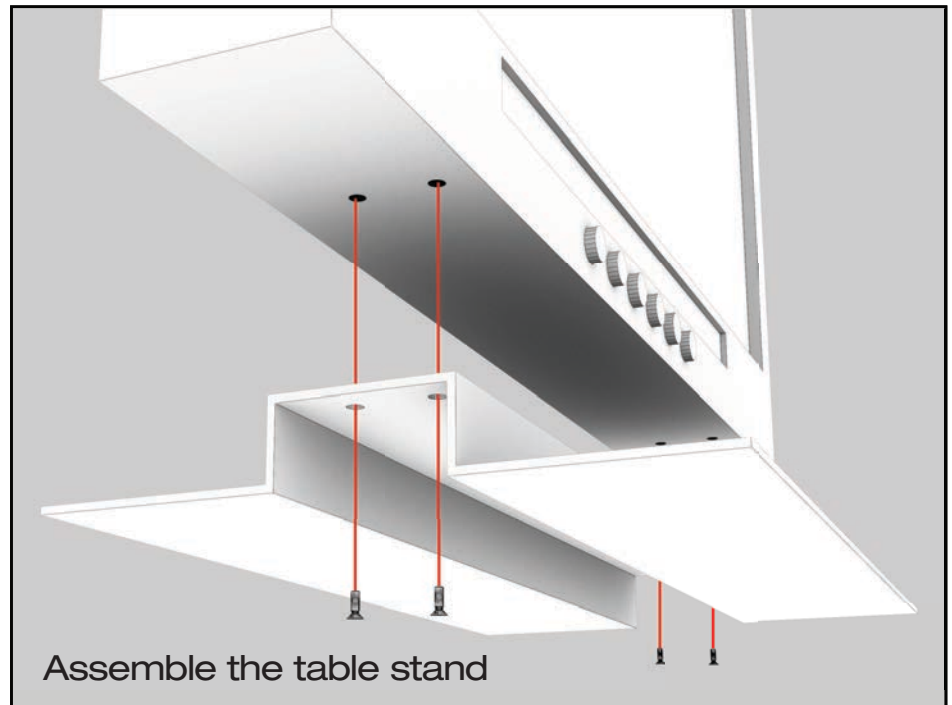

Assemble the table stand