**57**C



# Saga 7" On-Camera 4K Support HDMI/3G-SDI Monitor



### What's Included

- ☐ 1x S7C Monitor
- ☐ 1x Sun Hood
- ☐ 1x Power Adapter
- ☐ 1x Shoe Mount










### **Getting Started**

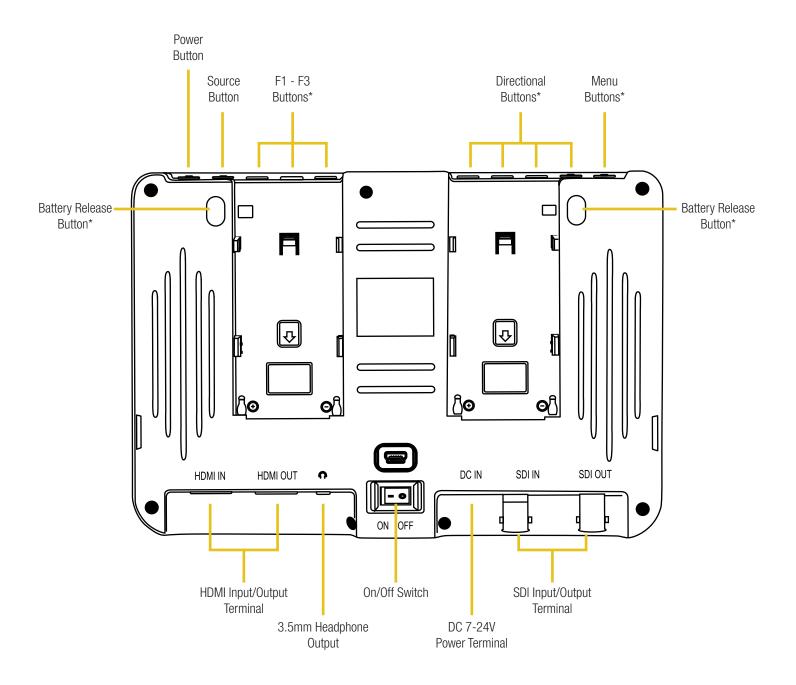

### **Button Notes**

**F1 - F3 Buttons:** Fuctions can be mapped in the menu.

**Directional Buttons:** Used to navigate the menu button and can also be mapped in the menu.

Menu Button: Opens the menu options.

Battery Release Buttons: Press to release the batteries.









### **Configuration of Setting Menus**

#### **Assistant**

Single Color – Toggle between mono colors: gray, red, green, blue

False Color – This feature utilizes a full spectrum of assigned color indicators to show overall brightness of the image. This helps achiever perfect exposure.

Peaking – The monitor is equipped with a color peaking feature which highlights the desired focus area in a bright color. The operator adjusts the focus until the subject is surrounded with the color outline.

Peaking Color – Adjust the color of peaking: red, green, blue.

Zebra – The monitor will display slanted lines where the image is overexposed or underexposed.

Histogram – Graphical representation of the tonal values of your image.

Audio Meters – Allows the operator to monitor audio channels.

#### Guides

Crosshair – Display a crosshair on the center of the screen.

Safety Guides – Safety border between the following: 80%, 85%, 90%, 93%, 96%

Aspect Guides – Toggle border between 4:3, 2.35:1, 1.85:1

Guide Color - Change the color of guide: white, black, red, green, blue

#### **Video Configuration**

Aspect Ratio - Toggle between Auto, 16:10, 16:9, 4:3, 1.85:1, 2.35:1

Scan Mode – Toggle between Under or OverScan

Pixel to Pixel – 1:1 pixel to pixel mapping

Zoom – Allows operator to zoom into the image

Flip-H - Flips the image horizontally

Flip-V – Flips the image vertically

Image Freeze - Freezes the image

Noise Reduction – Assist in reducing the noise in the monitor

#### **Color Settings**

Brightness - 0-100

Contrast - 0-100

Saturation - 0-100

Hue - 0-100

Sharpness - 0-100

Backlight - 0-100

Color Temp – 5600K, 6500K, 9300K, User (Custom)

#### **Function Setup**

Option to map the Up, Down, Left, Right, F1, F2, and F3 key for quick access to features.

#### **System Configuration**

Language - English, Chinese

Guide Masks – Off, Low, Middle, High

Osd Duration - Off, 5S, 10S, 15S

Vlume - 0-100

Reset – reset to factory settings

Update – used to update the monitor's firmware







## **Specifications**

Aspect Ratio	16:10
Backlight	LED
Brightness	450 cd/m2
Contrast Ratio	1100:1
Inputs	HDMI, 3G-SDI
Outputs	HDMI, 3G-SDI
Resolution	1920 x 1200
Shipping Dimensions	3 x 14.75 x 7.75 in.
Shipping Weight	2 lb
UPC Code	847983025992
Viewing Angle	178°(89°/89°)

## **Supported Video Signals Specifications**

HDMI	720x480i & 720x480p @ 59.94, 60 Hz
	720x576i & 720x576p @ 50 Hz
	1280x720p @ 50, 59.94, 60 Hz
	1920x1080i @ 50, 59.94, 60 Hz
	1920x1080psf @ 24, 25, 29.97, 30 Hz
	1920x1080p @ 23.97, 24, 25, 29.94, 30, 50, 59.94, 60 Hz
	3840x2160p @ 24, 25, 30 Hz
	4096x2160p @ 24 Hz
SDI	720x480i @ 59.94, 60 Hz
	720x576i & 720*576p @ 50 Hz
	1280x720p @ 50, 60 Hz
	1920x1080i @ 50, 59.94, 60 Hz
	1920x1080psf @ 24, 25, 29.97, 30 Hz
	1920x1080p @ 23.93, 24, 25, 29.97, 30, 50, 59.94, 60 Hz

## **Optional Accessories**

Some other products that work well with the S7C available from Ikan include:

MA207 7 in. Articulating ArmMA211 11 in. Articulating Arm

MA211-R 11 in. Articulating Arm w/ Single Rod Mount







### **Learn More**

More dynamic information at official website: www.ikancorp.com

### **Support**

Contact email: support@ikancorp.com

### **CONDITIONS OF WARRANTY SERVICE**

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

Free Service will not be provided in the following situations: (\*Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.

©2018 Ikan Corporation. All rights reserved







