




What's Included

- 2 x Teleprompters
- 2 x 25 ft HDMI Cables

Assembly

Step 1

Place teleprompter base assembly on a flat surface.

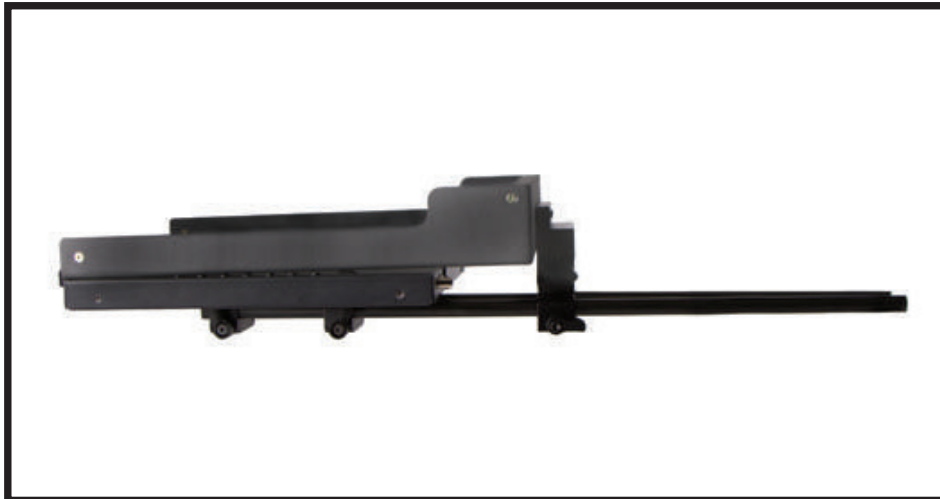


Step 2

You can position the glass at any angle you want, but the preferable angle is 45°.



Step 3

Slide the Camera Mount Assembly onto the 15mm Rods

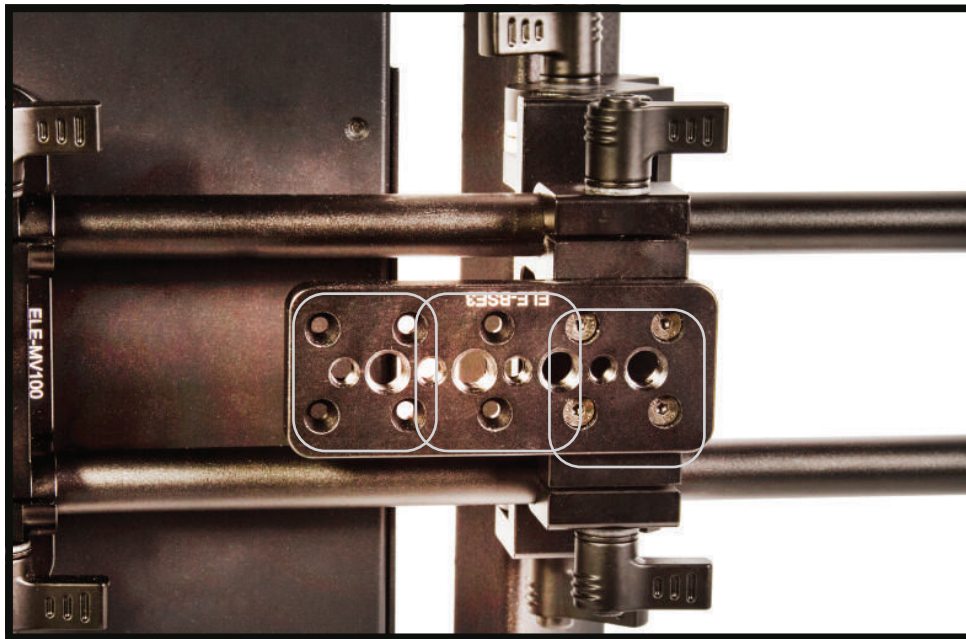


The tripod mount has 3 sets of holes that allows you to mount the plate either towards the front or rear to help balance the teleprompter better.

For larger cameras it is better to have the plate toward the rear, and for smaller cameras towards the front.

Step 4

Attach camera to camera mount and slide to best position. Make sure all thumbscrews are secure.

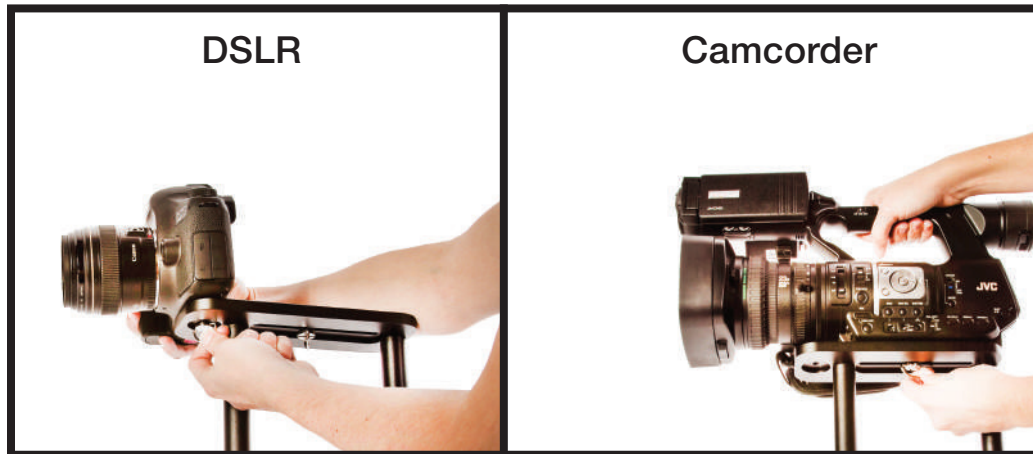


If you require the camera to be positioned higher, you can replace the 200mm raiser bars in place of the pre-installed 130mm Rods

Use the included 5/32 Hex Key to remove and attach the raiser rods.


Step 5

Attach hood to glass frame using the integrated magnets. You can attach the optional side flaps.

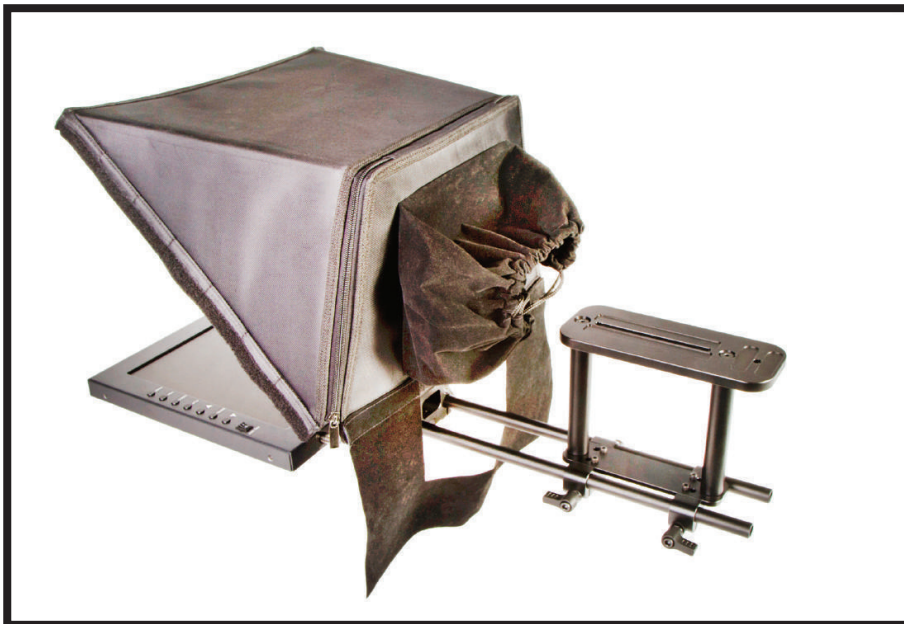

P2P Interview/Interviewee Setup

After both teleprompters have been setup and placed on tripods/pedestals, using one of the HDMI cables connect it to the camera on teleprompter 1 (interviewer) to the HDMI input port of monitor on teleprompter 2 (interviewee). Using the other HDMI cable connect it to the camera of teleprompter 2 (interviewee) to the HDMI input port of monitor on teleprompter 1 (interviewer).

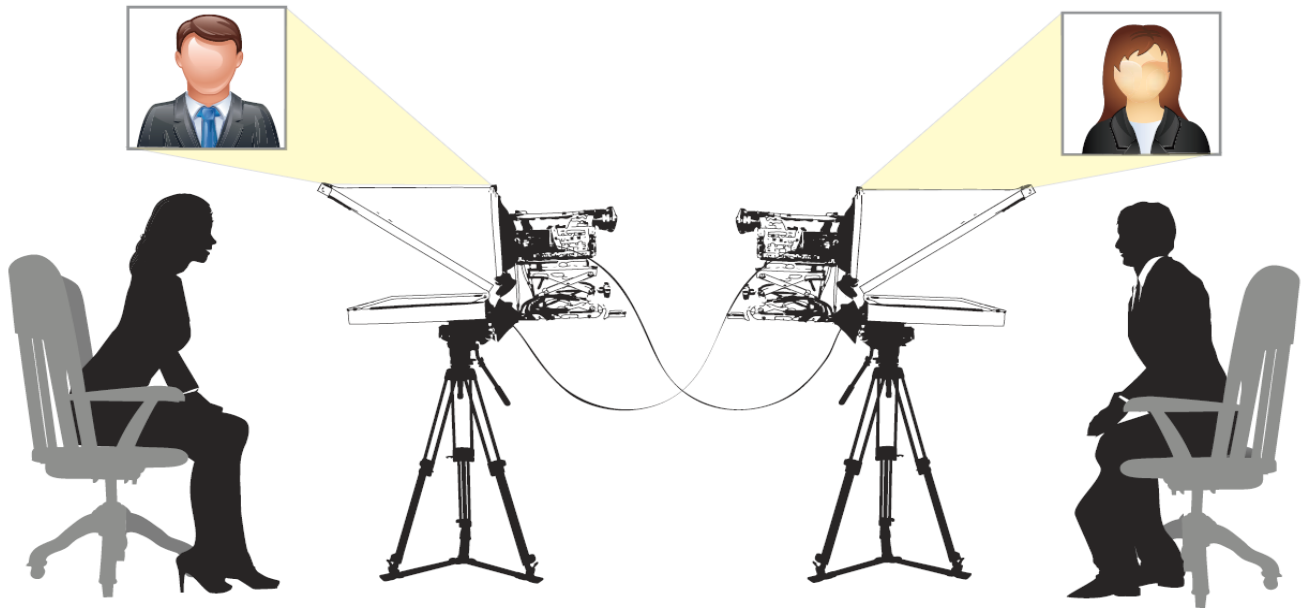


Foam Case

To make your teleprompter more portable, we packed it in a reusable, high-quality foam. The shape and size of the foam was designed to fit into Ikan's PT-CASE.




**** DO NOT THROW AWAY FOAM CASE ****

Monitor Ports

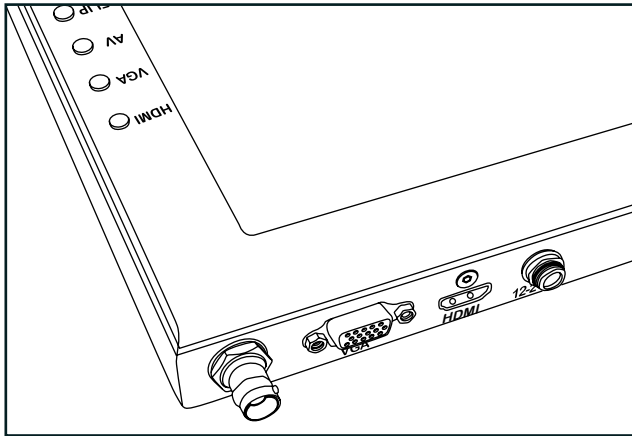

- BNC – AV Composite Input
- VGA – Video Graphics Array DE15 Connection
- HDMI – High-Definition Multimedia Interface Input Connection
- Power Port – 12-24v Input

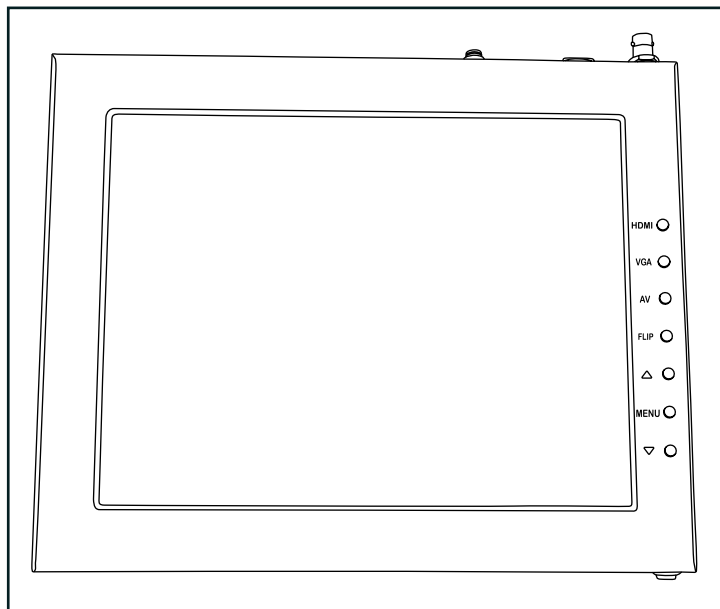

- HDMI – Switch HDMI input
- VGA – Switch to VGA input
- AV – Switch to composite BNC input
- Flip – Toggle image flip
(Can be set to horizontal, vertical, or both via menu)
- Up Arrow – Toggle up to adjust setting
- Menu – Access to monitor settings
- Down Arrow – Toggle down to adjust setting

Monitor Menu Settings

Video Config

- Contrast (White Level)
- Brightness (Black Level)
- Tint (Chroma Hue)
- Chroma (Chroma Saturation)
- Sharpness (Detail)
- RGB Setup – Manually configure RGB
- Return

System Config

- Menu Duration – Set duration of how long menu stays on screen
- Video Ratio – Set screen aspect ratio 16:9 or 4:3 (4:3 is native resolution, 16:9 will create black bars)
- Flip-H – Assign toggle button to flip image horizontally
- Flip-V – Assign toggle button to flip image vertically
- Reset – Factory reset
- Return

PC Setup (Only available for VGA)

- H-Position – Adjust horizontal position
- V-Position – Adjust vertical position
- Auto – Monitor automatically adjust position
- Return

Exit

How to set-up FLIP button feature:

1. Press MENU button
2. Navigate to SYSTEM CONFIG.
3. Navigate to FLIP-V or FLIP-H
4. Change FLIP-V and/or FLIP-H to "ON"
5. Exit MENU
6. The FLIP button should now be activated and can be pressed to mirror the image Horizontally or Vertically
7. When FLIP-H is ON, the image will flip Horizontally
8. When FLIP-V is ON, the image will flip Vertically
9. If both are ON, the FLIP button will toggle both Horizontal and Vertical flip

Specifications

PT3500-P2P

15" Teleprompter Systems

Aspect Ratio	4:3
Brightness	350 cd/m2
Build Material	Aluminum / Steel
Contrast Ratio	1000:1
Input Signal	Composite BNC, VGA, HDMI
Input Voltage	DC 12v / 4A
Mounting System	VESA 100 x 100
Power Consumption	10W (each monitor)
Reading Range	17 ft.
Monitor Screen Size	15"
Resolution	1280 x 1024
Viewing Angle	160° (H) / 140° (V)
Shipping Weight	21 lbs (box 1); 21 lbs (box 2)
Shipping Dimensions	30" x 20" x 11" (box 1) 30" x 20" x 11" (box 2)
UPC	847983032518

PT3700-P2P

17" Teleprompter Systems

Aspect Ratio	4:3
Brightness	350 cd/m2
Build Material	Aluminum / Steel
Contrast Ratio	1000:1
Input Signal	Composite BNC, VGA, HDMI
Input Voltage	DC 12v / 4A
Mounting System	VESA 100 x 100
Power Consumption	10W (each monitor)
Reading Range	20 ft.
Monitor Screen Size	17"
Resolution	1280 x 1024
Viewing Angle	160° (H) / 140° (V)
Shipping Weight	24 lbs (box 1); 24 lbs (box 2)
Shipping Dimensions	30" x 20" x 11" (box 1) 30" x 20" x 11" (box 2)
UPC	847983032532

Supported Video Signals

HDMI

720x480i & 720x480p @ 59.94, 60 Hz
720x576i & 720x576p @ 50 Hz
1280x720p @ 50, 59.94, 60 Hz
1920x1080i @ 50, 59.94, 60 Hz
1920x1080psf @ 24, 25, 29.97, 30 Hz
1920x1080p @ 23.97, 24, 25, 29.94, 30, 50, 59.94, 60 Hz

Supported Video Signals

HDMI

720x480i & 720x480p @ 59.94, 60 Hz
720x576i & 720x576p @ 50 Hz
1280x720p @ 50, 59.94, 60 Hz
1920x1080i @ 50, 59.94, 60 Hz
1920x1080psf @ 24, 25, 29.97, 30 Hz
1920x1080p @ 23.97, 24, 25, 29.94, 30, 50, 59.94, 60 Hz



Learn More

More dynamic information at official website: www.ikancorp.com

Support

Contact email: support@ikancorp.com

CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

Free Service will not be Provided in the Following Situations:(*Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.

©2018 ikan Corporation. All rights reserved

